

**Honeywell**



## **MASTERSEAL PLUS**

Total protection from dust and water



GHAR MEIN **HONEYWELL**, TOH LIFE VERY WELL!



## Masterseal Plus

Masterseal Plus™ has been specifically developed for use in both outdoor and indoor environments, and where wiring devices and accessories would be at risk from dust and water.

With a rating of IP66, Masterseal Plus™ offers total protection against dust, and is protected against high pressure jets of water from any direction.

An improved catch eases the opening and closing of the lid, whilst ensuring the integrity of the seal. The seal is fixed to the mounting frame of the product, enabling rapid installation, and removing the risk of error when placing a floating gasket.

Masterseal Plus™ is perfectly suited to a range of indoor and outdoor applications including factories, laboratories, swimming pools, commercial kitchens, industrial units, warehouses, clean rooms and more.

## Features

The Masterseal range has been specifically designed for use outdoors and indoors and in areas heavily exposed to dust and splashing water.

### IP66

Masterseal Plus offers total dust ingress protection and is protected against high pressure water jets from any direction

### Robust Construction and Temperature tolerant

Masterseal Plus will not discolor, crack or fade in UV light and will maintain operation in extremes of heat and cold

### Impact Protection


Masterseal Plus enclosures are made from recycled polycarbonate one of the toughest thermoplastics available - incidentally also used in products such as motorcycles helmets.

### 20 Year Guarantee

Masterseal Plus is guaranteed for an industry-leading 20 years

### Why Polycarbonate?

The Masterseal range is made with Polycarbonate, one of the toughest thermoplastics available today so tough and durable that it's used in motorcycle helmets and car bumpers. It will not discolour, crack or fade in UV light (unlike many other plastics). It has better resistance to chemicals than many other plastics and will maintain its high resistance to impact in extremes of heat and cold.

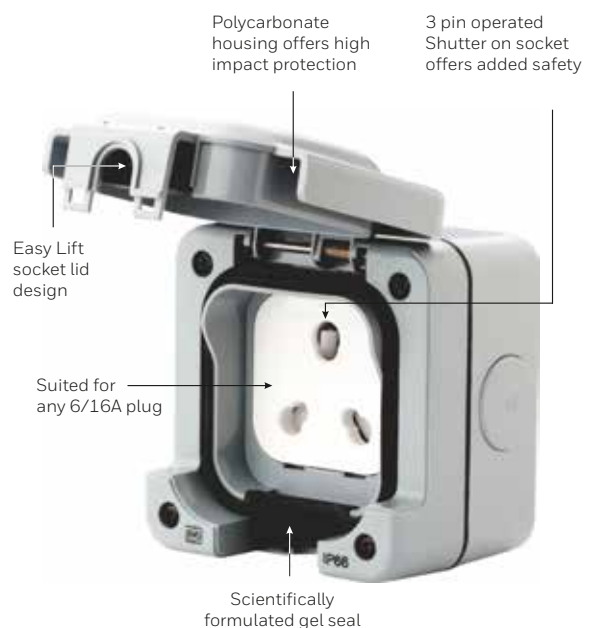



## IP66 Enclosures

K56400 GRY



10 AMP SP 1  
gang one way

K56401 GRY



10 AMP SP 1  
gang two way

K56402 GRY



10 AMP SP 2  
gang one way

K56407 GRY



10 AMP SP 1  
gang two way  
"Bell Push"

K56409 GRY



20 AMP DP 1  
gang one way  
'Press'

### Sockets

56416 GRY\*



6/16AMP  
3 Pin Socket  
\*IP56 rating

### Switched Socket

86893 GRY\*



16AMP  
Switched Socket  
\*IP66 enclosure

### Junction Box

K56506 GRY



Junction box  
with four 4-  
way terminals

### Flush Mounting Bezel

K56502 GRY



1 gang plaster / tile  
flush mounting bezel  
for use with 56504

### 20A DP Enclosure#

56896 BLK



20A DP 1 way  
(Snap fit)

K56420 GRY



Switch enclosure  
for 56896BLK

56896BLK and K56420GRY should be assembled to get Ingress Protected 20A DP enclosure

### Flush Mounting Frame


56500 GRY



1 gang plaster / tile  
flush mounting frame  
with protective cover for  
95 x 95 mm products

### Rear Entry Back Box

56504 GRY



1 gang box rear  
conduit entry

## Conduit Entries

56461 BLK



PVC cable entry to  
provide direct entry of  
power cable to the unit  
via the bottom box entry

56462 BLK



20mm plain conduit entry  
push fit adaptor between  
back box and 20mm  
plain conduit

56500 GRY



20mm threaded conduit entry  
push fit adaptor between  
back box and 20mm  
threaded conduit

56504 GRY



Box coupler for  
ganging one Masterseal  
box next to another

# Price on request

## Masterseal Plus Technical

### Switches

#### Standards and approvals

Switches and enclosures comply with BS EN 60669-1:2000 and are IP66 for BS EN 60529: 1992

20A Switch module complies with BS 3676: Part 1: 1989

10A switch module complies with BS EN 60669-1: 2000

All products comply with or allow compliance with the 16th Edition of the IEE Wiring Regulations (BS 7671)

#### Description

A range of switches and enclosures specifically designed for outdoor use or in areas heavily exposed to dust and/or splashing water. Constructed from extremely robust polycarbonate, the range is sealed to IP66 against dust, water and is impact resistant. Masterseal is easy to install and the large rocker switches and clip in moulds make it easy to use and operate.

### Socket Outlets

#### Standards and approvals

Socket outlets comply with IS 1293: 88

All products allow compliance with the 16th edition of the IEE Wiring Regulations (BS 7671) when correctly installed.

#### Description

Socket outlets are specifically designed for outdoor use or in areas heavily exposed to dust and/or splashing water. Constructed from extremely robust polycarbonate, the range is sealed to IP56 against the dust, water and is impact resistant and will take in any 6/16A plug\* allowing safe connection to any appliance.

#### Operation

1. To maintain the IP rating of the product with a plug in position, the lid must be closed and latched with the cable held in position within the cable seal.
2. The product will accept majority of 6/16A plugs.
3. The cable seal will remain effective at temperature below zero provided a plug is not installed or removed at these temperatures.

#### Masterseal plug insertion procedure

1. To open the socket lid, press the protrusions on the bottom of the lid and lift lid, exposing the socket (see Fig. 1)
2. Insert plug as required and close lid, pressing until both the cable outlet latch, and lid latch on the right hand side, are engaged

### Technical specifications

#### Electrical

**Voltage rating:** 250V a.c, 50 Hz

**Current Rating:** 10 or 20 amps-no derating when used on fluorescent or inductive loads.

**Load Type:** No Restriction

#### Physical

**Ambient operating temperature:** -0°C to +40°C

**IP Rating:** IP66

**Maxi. installation Altitude:** 2000 Meters

### Technical specifications

#### Electrical

**Voltage rating:** 250V a.c

**Current Rating:** 6/16A per socket outlet

**Terminal Capacity:**  
Live, neutral & earth  
3x2.5mm<sup>2</sup>  
3x4mm<sup>2</sup>  
2x6mm<sup>2</sup> (Standard)


#### Physical

**Ambient operating temperature:** -0°C to +40°C

**IP Rating:** IP56

**Maxi. installation Altitude:** 2000 Meters

Figure 1

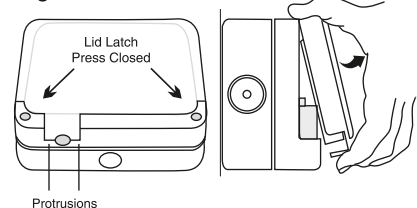

## Masterseal Plus Technical

### Surface mounting for rear entry



This option is for use in 'tamperproof' environments e.g. schools and public areas.  
For this application the cable or conduit enters Masterseal enclosure from the rear only (there are no side entries).

### Surface mounting for side entry conduit



The basic Masterseal unit comes complete with a standard surface mounting back box. This enables top, bottom or side entry for the cable or conduit.





## Masterseal Plus Technical

### Flush mounting for plaster/tiled walls



Ideal for environments where hygiene is paramount, for example, hospitals and kitchens.

The Flush Mounting Frame is provided with spacers which are used to adjust the height of the box depending upon the depth of plaster, tiling or rendering to be applied to the mounting surface.




### Flush mounting for any finished surface



The bezel provides an alternative method of flush mounting in areas where hygiene is important e.g. food preparation areas.

This bezel can be used on any finished surface e.g. brick or cavity walls. The bezel should be used in conjunction with the rear entry back box.

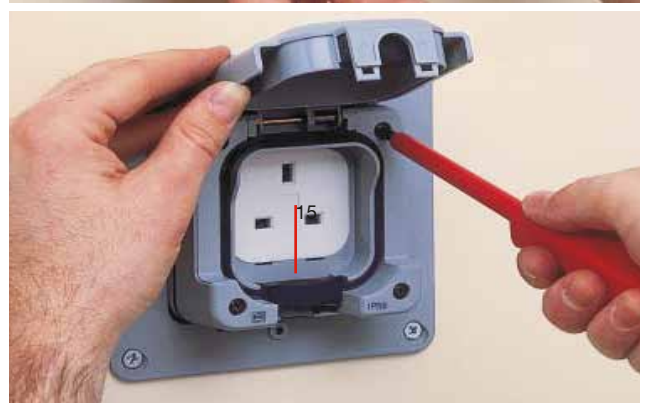

## Masterseal Plus Technical

Polycarbonate Chemical Resistance Table

Reagent	Concentration	Resistance
Acetic Acid, aqueous	40	■
Acetic Acid, aqueous	5	▲
Acetone		■
Ammonia, aqueous	10	■
Benzene		■
Beverages, alcoholic		▲
Bitumen		Not tested
Bleaching lye, aqueous		■
Boric Acid	10	▲
Butanol		■
Butter		●
Butyric acid		■
Calcium chloride, aqueous	10	▲
Carbon tetrachloride		■
Chlorine gas		●
Chlorine, aqueous solution		■
Chloroform		■
Citric acid, aqueous	10	▲
Coconut oil		▲
Diesel fuel		●
Edible fats		▲
Edible oils		▲
Ethanol	96	▲
Ethylene acetate		■
Ethylene ether		■
Formaldehyde, aqueous	30	▲
Formic acid, aqueous	40	●
Frigen, liquid		Not tested
Fruit juices		▲
Fuel oil (heating)		●
Gas liquor		Not tested
Glycerine		▲
Glycol		▲
Glycantine, aqueous	40	Not tested
Hexane		▲
Hydrochloric acid, aqueous	2	■
Hydrofluoric acid, aqueous	40	▲
Hydrogen peroxide, aqueous	10	▲
Ink		▲
Iodine tincture, alcoholic		■

Reagent	Concentration	Resistance
Kerosene		■
Lactic acid, aqueous	10	▲
Lavender oil		Not tested
Linseed oil		Not tested
Machine oils		▲
Mercury		▲
Methanol		■
Methylene chloride		■
Milk		▲
Mineral oils		▲
Nitric acid, aqueous	2	▲
Oleic acid		▲
Ozone		▲
Paraffin oil		▲
Peppermint oil		Not tested
Perfumes		■
Petrol (gasoline)		●
Phenol, aqueous		■
Phosphoric acid, aqueous	10	■
Potassium hydroxide solution, aqueous5		■
Potassium hydroxide solution, aqueous50		■
Rose oil		●
Salt solution, household, aqueous	10	▲
Silicon oils		▲
Soap solution, aqueous		▲
Soda solution, aqueous	10	▲
Sodium hydroxide solution, aqueous	10	■
Sodium, aqueous	10	Not tested
Sulphur		▲
Sulphuric acid, aqueous	10	▲
Tallow		▲
Tar		▲
Tetrachloroethene		■
Toluene		■
Trichlorethane		■
Vaseline		▲
Water		▲
Water, hot (80oC)		●
Wax, melted		Not tested
Xylene		■

Key: ▲ Resistant ● Limited resistance ■ Not resistant

# GHAR MEIN **HONEYWELL**, TOH LIFE VERY WELL!

## **BANGALORE**

3<sup>rd</sup> Floor, Chambers @ Mantri  
Municipal No. 10  
Richmond Road  
Bangalore - 560 025  
Tel: +91-80-67124120/21/22/23  
E-mail: eccbangalore@honeywell.com

## **BARODA**

2<sup>nd</sup> Floor, Startrek  
Opp. Rajlakshmi Complex  
Old Padra Road,  
Baroda - 390 005  
Tel: +91-265-6699600  
Fax: +91-265-6699610  
E-mail: eccbaroda@honeywell.com

## **Honeywell International India Pvt. Ltd.**

Unitech Trade Center  
5<sup>th</sup> Floor, Sector 43 ,Block C  
Sushant Lok, Phase 1  
Gurgaon - 122 022  
Tel: +91-124-4975050  
Fax: +91-124-6715014  
E-mail: eccdelhi@honeywell.com

## **Honeywell Electrical Devices & Systems India Limited**

Chennai: 3<sup>rd</sup> & 4<sup>th</sup> Floor  
57, 59, 61 & 63 Dowlath Towers, Taylors Road  
Kilpauk, Chennai - 600 010, India  
Tel: +91-44-66085600  
Email: eccteamindia@honeywell.com  
Email: eccchennai@honeywell.com  
www.honeywell.com

## **Honeywell Automation India Limited**

Pune: Plot No. 56/57,  
Hadapsar Industrial Estate  
Pune - 411 013, India  
Tel: +91-20-66039400  
Fax: +91-20-66039800  
Email: eccpune@honeywell.com

## **Honeywell Electrical Devices & Systems**

Customer Care: 1800 103 3848  
WhatsApp: +91 81306 91299  
www.honeywell.com

## **HYDERABAD**

8-2-418, Krishnama House  
3<sup>rd</sup> Floor, Road No. 7  
Banjara Hills  
Hyderabad - 500 034  
Tel: +91-40-66030900/70  
Fax: +91-40-66030971  
E-mail: ecchyderabad@honeywell.com

## **KOLKATA**

Srijan Techpark  
8<sup>th</sup> Floor, DN-52  
Salt Lake, Sector-V  
Kolkata - 700 091  
Tel: +91-33-66283693/94  
Fax: +91-33-66283701  
E-mail: ecckolkata@honeywell.com

## **MUMBAI**

Eco-elite Building,  
2<sup>nd</sup> Floor, Marol Marishi Road, Marol  
Next to Zakaria Industrial Estate  
Andheri (E), Mumbai - 400 059  
Tel: +91-22-67650680/81  
Fax: +91-22-67650682  
E-mail: eccmumbai@honeywell.com

**Honeywell**

