

Life Is On


Schneider
Electric



 Price List

Final Distribution, Wiring Devices and Lighting Control Products

With effect from January 25th, 2022

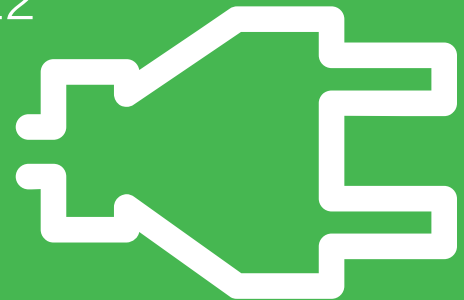

se.com/in

Acti 9 Distribution System	
> Miniature Circuit Breakers (MCBs).....	8
> Residual Current Devices.....	12
> Auxiliaries and Accessories for MCBs / RCDs.....	14
> Surge Protection Devices.....	16
> Control and Command Products.....	18
> ComReady Control and Command Products.....	20
> Isobar Distribution System	22
> Acti 9 Isobar Pan Assembly	23
> Acti 9 Distribution Boards.....	24
> Modular Distribution Boards - Metallic.....	28
Kaedra Enclosures	
> Weather Proof	34
Pratika	
> Plugs and Sockets - IP44 / IP67	36
Electra	
> Metal Clad Plugs & Sockets.....	40
56 Series	
> Plugs and Sockets - IP56 / IP66	41
Wiring Devices	
> Wiser Odace™ Lighting	46
> LIVIA - Switch to the extra-ordinary.....	47
> Clipsal X - As Stylish As Your World.....	48
> Opale - Switches with Satin Finish	50
> Unica Pure - Irresistibly Beautiful.....	53
> ZENcelo India - The Revolutionary Full-Flat Switch.....	57
> ZENcelo BS - The Revolutionary Full-Flat Switch	59
> AvatarOn - It's also a Switch.....	61
> NEO - Face the Future.....	69
> ULTI Impress - The Ultimate Switch	70
> Kavacha - Weather Protected Series.....	72
> Metal Boxes.....	73
Control System	
> EzInstall 3 - ULTI ZIGBEE.....	74
> Hotel Series	75
> Wiser.....	77
> Surface and Flush Mount Occupancy Sensors.....	78
> Dimmable Sensors with Light Regulation.....	78
> Wall Mount Sensors.....	79
> Hotel - ELV Dual Motion Sensor	79
> Timers & Time Switches	80

Acti 9 | Advanced Communication Technology that Inspires

> Protection devices

- Miniature circuit breakers
- Residual current circuit breakers
- Vigi™ residual current devices
- Surge Protection Devices

> Protection monitoring and supervision

- Indication and tripping auxiliaries
- Remote control auxiliaries
- Automatic reclosure auxiliaries



Innovative
Protection monitoring Total control and
Metering @ DB level



Efficient
Manage loads, reduce operating and project
costs, and accurately plan maintenance

> Control and monitoring

- Contactors
- Impulse relays
- Integrated control circuit breakers
- Light indicators
- Push-buttons and selector switches
- Kilowatt hour meters
- Communicating architecture

> Installation system

- IP20B terminals
- Splitter blocks
- Full range of mounting and wiring accessories



Reliable

Dual certifications for one product, 100 percent MCB and RCD coordination, easy ordering and design, error free fast connections

Acti 9 | Advanced Communication Technology that Inspires.....

> Innovative

- Centralized control system including energy metering
- Large and variable data reading and computing through universal Modbus protocol

> Efficient


- One-click, prefabricated wiring for comprehensive communication between your distribution board or panel and any facility management system

> Reliable

- Error proof connection leading to reduction in downtime
- EMC tested for immunity, radiated and conducted safety

NEW


Email Notification upon Event (Devices Status Change, Alarm threshold reached etc.)

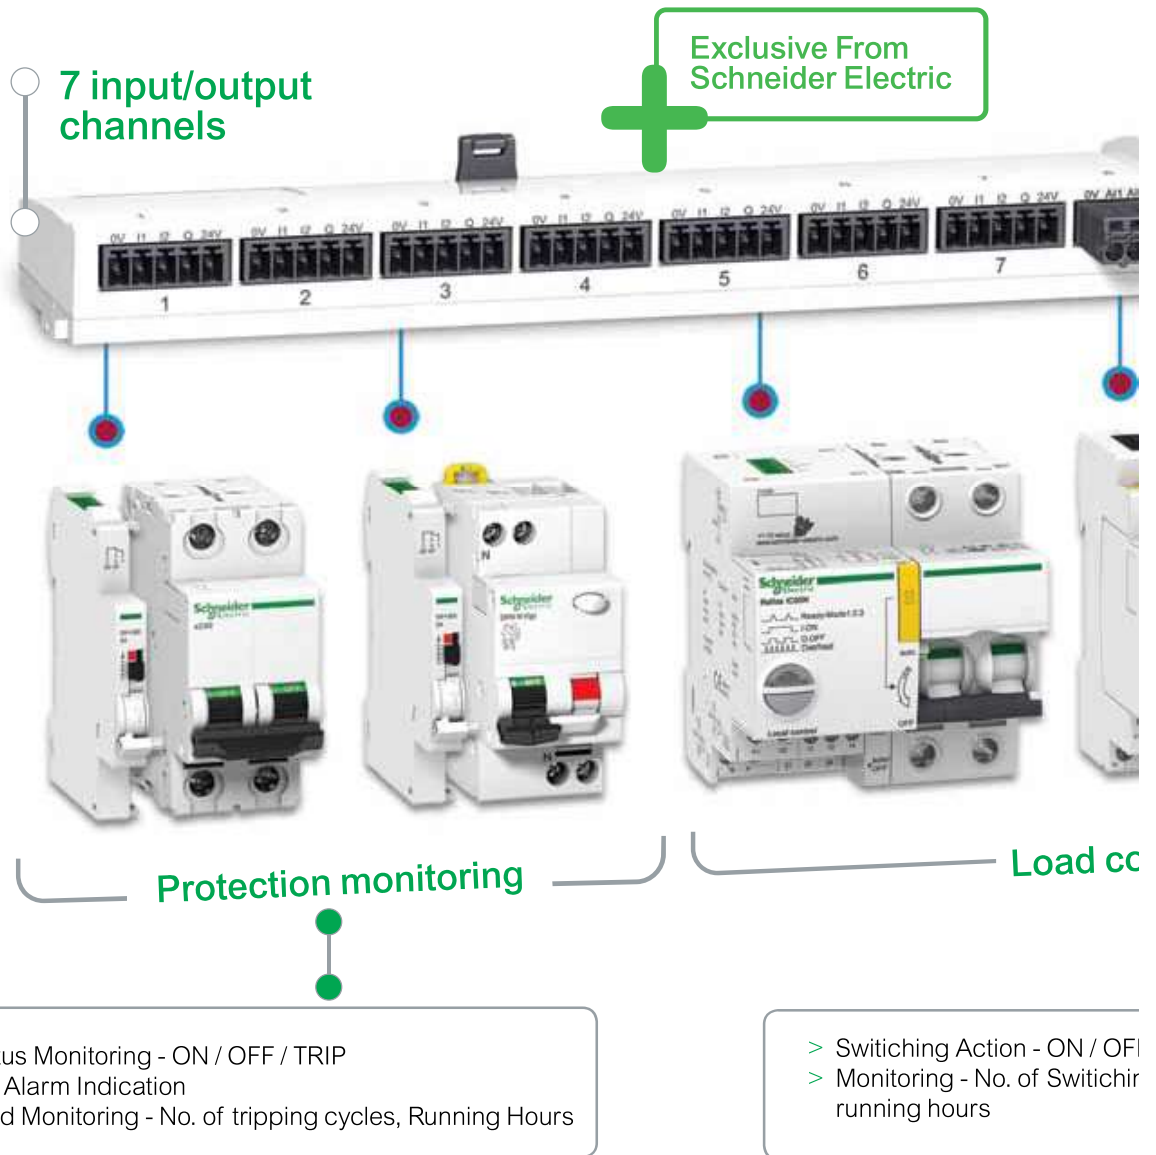

Meets the challenge of all your applications

Detailed load control, reduced downtime and accurately planned maintenance

Ready to connect to any facility management solution

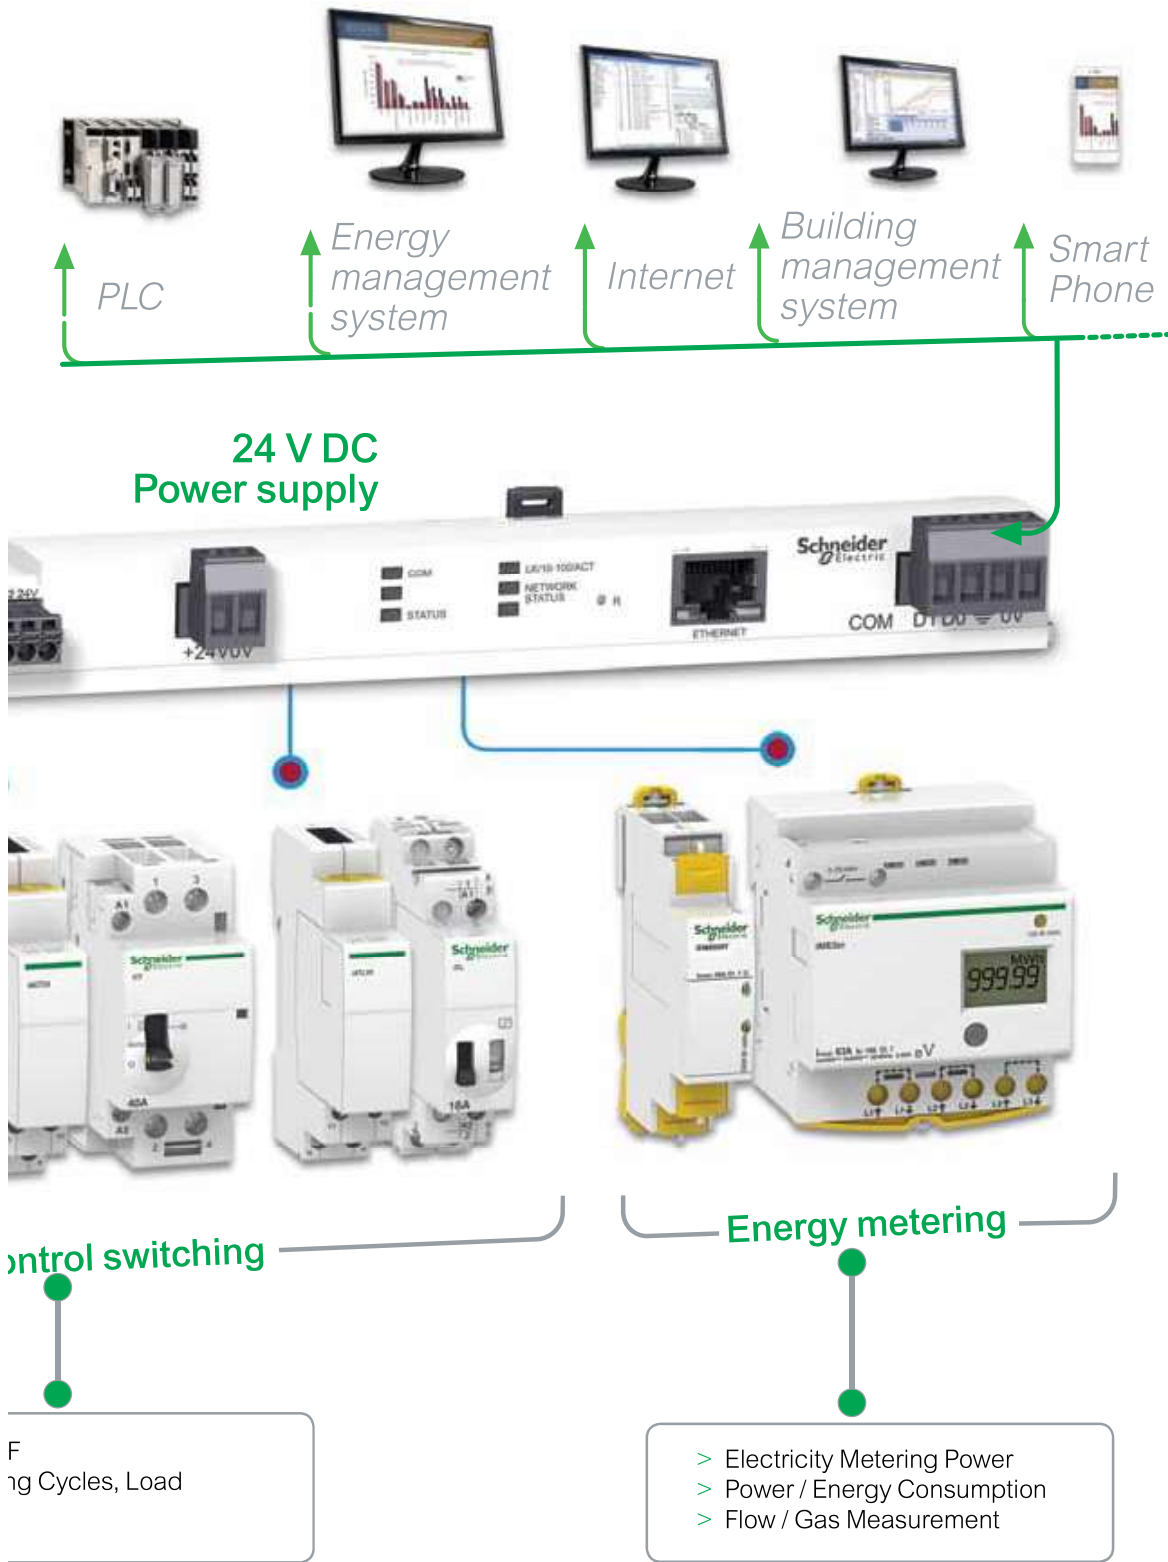

Green Premium Products
 100% Recyclable and Recoverable
 REACh, RoHS, PEP, EOL1 compliant

AC Miniature Circuit Breakers - xC60



- Breaking Capacity as per IEC 60898 and IS/IEC 60898-1, Icn = 10kA
- Breaking Capacity as per IEC 60947-2, Icn = 15kA, upto 40A
- Can be used for DC application upto 60V per pole
- Higher system performance with optimized cost: Cascading*
- Increased System Continuity: Discrimination*
- Higher Installation Life: Energy Limitation Class 3, Fast Closure Mechanism
- Ease, Speed and Flexibility of installation - Biconnect, Line-Load Reversible
- Field-fittable auxiliaries for advance protection and monitoring
- Positive Contact Indication for assurance of disconnection

[In] Rated Current (A)	1 Pole Reference	Unit MRP [₹]	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width**	1 mod		2 mod		3 mod		4 mod	
MOQ	12 Nos.		6 Nos.		4 Nos.		3 Nos.	

B curve

6	A9N1P06B	431	A9N2P06B	1280	A9N3P06B	2124	A9N4P06B	2861
10	A9N1P10B	431	A9N2P10B	1280	A9N3P10B	2124	A9N4P10B	3019
16	A9N1P16B	431	A9N2P16B	1280	A9N3P16B	2124	A9N4P16B	2861
20	A9N1P20B	431	A9N2P20B	1280	A9N3P20B	2124	A9N4P20B	2861
25	A9N1P25B	431	A9N2P25B	1280	A9N3P25B	2124	A9N4P25B	2861
32	A9N1P32B	431	A9N2P32B	1280	A9N3P32B	2124	A9N4P32B	2861
40	A9N1P40B	937	A9N2P40B	2060	A9N3P40B	3235	A9N4P40B	4120
50	A9N1P50B	937	A9N2P50B	2060	A9N3P50B	3235	A9N4P50B	4196
63	A9N1P63B	949	A9N2P63B	2117	A9N3P63B	3262	A9N4P63B	4157

C curve

1	A9N1P01C	661	A9N2P01C	1773	A9N3P01C	2797	A9N4P01C	3521
2	A9N1P02C	661	A9N2P02C	1773	A9N3P02C	2797	A9N4P02C	3521
3	A9N1P03C	661	A9N2P03C	1773	A9N3P03C	2797	A9N4P03C	3521
4	A9N1P04C	661	A9N2P04C	1773	A9N3P04C	2797	A9N4P04C	3521
6	A9N1P06C	399	A9N2P06C	1280	A9N3P06C	2124	A9N4P06C	2861
10	A9N1P10C	399	A9N2P10C	1280	A9N3P10C	2124	A9N4P10C	2861
16	A9N1P16C	399	A9N2P16C	1280	A9N3P16C	2124	A9N4P16C	2861
20	A9N1P20C	399	A9N2P20C	1280	A9N3P20C	2124	A9N4P20C	2861
25	A9N1P25C	399	A9N2P25C	1280	A9N3P25C	2124	A9N4P25C	2861
32	A9N1P32C	399	A9N2P32C	1280	A9N3P32C	2124	A9N4P32C	2861
40	A9N1P40C	937	A9N2P40C	2060	A9N3P40C	3235	A9N4P40C	3941
50	A9N1P50C	937	A9N2P50C	2060	A9N3P50C	3235	A9N4P50C	4157
63	A9N1P63C	949	A9N2P63C	2079	A9N3P63C	3262	A9N4P63C	4228

D curve

1	A9N1P01D	668	A9N2P01D	1791	A9N3P01D	2841	----	----
2	A9N1P02D	668	A9N2P02D	1791	A9N3P02D	2841	A9N4P02D	3707
3	A9N1P03D	668	A9N2P03D	1791	A9N3P03D	2841	A9N4P03D	3808
4	A9N1P04D	668	A9N2P04D	1791	A9N3P04D	2841	A9N4P04D	3808
6	A9N1P06D	563	A9N2P06D	1342	A9N3P06D	2237	A9N4P06D	2968
10	A9N1P10D	563	A9N2P10D	1342	A9N3P10D	2237	A9N4P10D	2968
16	A9N1P16D	563	A9N2P16D	1342	A9N3P16D	2237	A9N4P16D	2968
20	A9N1P20D	563	A9N2P20D	1342	A9N3P20D	2237	A9N4P20D	2968
25	A9N1P25D	563	A9N2P25D	1342	A9N3P25D	2237	A9N4P25D	2968
32	A9N1P32D	563	A9N2P32D	1342	A9N3P32D	2237	A9N4P32D	2968
40	A9N1P40D	1011	A9N2P40D	2178	A9N3P40D	3426	A9N4P40D	4298
50	A9N1P50D	1099	A9N2P50D	2178	A9N3P50D	3426	A9N4P50D	4298
63	A9N1P63D	1023	A9N2P63D	2204	A9N3P63D	3458	A9N4P63D	4341

Note: * Please contact nearest Schneider Electric Sales Office or Customer Care Center for coordination chart
**18mm/module

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

AC Miniature Circuit Breakers - C120



- Breaking capacity as per IEC 60898, Icn = 10kA/15kA
- Positive Contact Indication for assurance of disconnection
- Degree of pollution: 3 (suitable for industrial environment)
- Operating Temperature: -30 to 70°C
- Terminal connections: Flexible cables up to 35 sq.mm; Rigid cables up to 50 sq.mm

[In] Rated Current (A)	1 Pole Reference	Unit MRP [₹]	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width**	1.5 mod		3 mod		4.5 mod		6 mod	
MOQ	12 Nos.		6 Nos.		4 Nos.		3 Nos.	
C120N (10kA)								
80	A9N18357 ✓	3536	A9N18361 ✓	7836	A9N18365 ✓	12310	A9N18372 ✓	16042
100	A9N18358 ✓	3967	A9N18362 ✓	8359	A9N18367 ✓	13120	A9N18374 ✓	16715
125	A9N18359 ✓	4365	A9N18363 ✓	9187	A9N18369 ✓	14552	A9N18376 ✓	18917
C120H (15kA)								
80	A9N18446	4359	A9N18457	9619	A9N18468	14467	A9N18479	20073
100	A9N18447	4899	A9N18458	9861	A9N18469	15761	A9N18480	22255
125	A9N18448	5254	A9N18459	11187	A9N18470	17009	A9N18481	23510

DC Miniature Circuit Breakers - C60H



- Specially designed MCB for enhanced protection in DC installation
- Magnetic Arc Chutes to quick break DC current in event of fault
- Breaking capacity 6kA as per IEC 60947-2
- Voltage Rating: 1P - 250 V DC & 2P - 500 V DC
- Impulse Voltage: 6 kV
- Higher Installation Life: Energy Limiting Class: 3

[In] Rated Current (A)	Module Width 18mm/ module	1 Pole Reference	Unit MRP [₹]	Module Width 18mm/ module	2 Pole Reference	Unit MRP [₹]
MOQ		12 Nos.			6 Nos.	
C60H-DC						
0.5	1	A9N61500	1359	2	A9N61520	3621
1	1	A9N61501 ✓	1203	2	A9N61521 ✓	2483
2	1	A9N61502 ✓	1203	2	A9N61522 ✓	2483
3	1	A9N61503 ✓	1203	2	A9N61523 ✓	2483
4	1	A9N61504 ✓	1203	2	A9N61524 ✓	2483
5	1	A9N61505	1203	2	A9N61525	2483
6	1	A9N61506 ✓	988	2	A9N61526 ✓	2020
10	1	A9N61508 ✓	988	2	A9N61528 ✓	2020
16	1	A9N61511 ✓	988	2	A9N61531 ✓	2020
20	1	A9N61512 ✓	988	2	A9N61532 ✓	2020
25	1	A9N61513 ✓	988	2	A9N61533 ✓	2020
32	1	A9N61515 ✓	1138	2	A9N61535 ✓	2020
40	1	A9N61517 ✓	1354	2	A9N61537 ✓	2980
50	1	A9N61518 ✓	1354	2	A9N61538 ✓	2980
63	1	A9N61519 ✓	1354	2	A9N61539 ✓	2980

Special application MCBs



Solar Application – PV DC

- DC MCB for multi string PV installations
- Operating Voltage: 800V DC
- Current Rating up to 25A
- Complies to IEC / EN 60947-2



Rail Application* (including Rolling Stock)

- Fire & smoke Resistant – Level 2 (NF F 16-101, NF F 16-102)
- Shock & vibration resistant (IEC 61373) – Cat 1, Class B
- Breaking Capacity: up to 25kA
- Complies to IEC / EN 60947-2



UL MCB

- Type: UL1077, UL489
- Breaking Capacity of 10kA
- Complies to IEC 60947-2 / UL1077 / UL489 / CSA

Note:

Please contact nearest Schneider Electric sales office or Customer Care for Reference and prices of Application Specific MCBs

*Rail Application RCDs are also available on demand


**18mm/module

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

AC Miniature Circuit Breakers - NG125

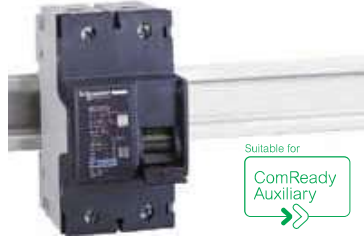

- Compliance to IEC / EN 60947-2
- High Breaking Capacity MCBs – up to 50kA
- Current Rating up to 125A
- Trip on fault indication on front face of MCB
- Suitability for isolation in the industrial sector to IEC/EN 60947-2
- Available in B, C, D Curves

[In] Rated Current (A)	1 Pole Reference	Unit MRP [₹]	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width**	1.5 mod		3 mod		4.5 mod		6 mod	

NG125N – 25kA Breaking Capacity

10	18610	5291	18621	12170	18632	17657	18649	23448
16	18611	5291	18622	9387	18633	18459	18650	22428
20	18612	5298	18623	11641	18634	17657	18651	22422
25	18613	5291	18624	11641	18635	17663	18652	22428
32	18614	5291	18625	11376	18636	17663	18653	23441
40	18615	6823	18626	14423	18637	23107	18654	30398
50	18616	8513	18627	14988	18638	23094	18655	29363
63	18617	6823	18628	15693	18639	25966	18656	32096
80	18618	7196	18629	17631	18640	27296	18658	32317

NG125H – 36kA Breaking Capacity

10	18705	6394	18714	10356	18723	15432	18732	28098
16	18706	6394	18715	10356	18724	15432	18733	28098
20	18707	6388	18716	10356	18725	21091	18734	28098
25	18708	6223	18717	13664	18726	21083	18735	28105
32	18709	6223	18718	13664	18727	22049	18736	28098
40	18710	7621	18719	15793	18728	22453	18737	34148
50	18711	7768	18720	17077	18729	27574	18738	35073
63	18712	7981	18721	18335	18730	23002	18739	38500
80	18713	8780	18722	23941	18731	29758	18740	40604

NG125H – 50kA Breaking Capacity

10	18777	8113	18788	16957	18799	26714	18810	35591
16	18778	7760	18789	16957	18800	26714	18811	35591
20	18779	7760	18790	18282	18801	26714	18812	35591
25	18780	7760	18791	18275	18802	26707	18813	35591
32	18781	7760	18792	18275	18803	27921	18814	37209
40	18782	9418	18793	21749	18804	33382	18815	44174
50	18783	13226	18794	22847	18805	35745	18816	43491
63	18784	9889	18795	24445	18806	37529	18817	48662
80	18785	14569	18796	26860	18807	41608	18818	50269

**18mm/module

Note: Reference provided above are for C Curve MCBs – B and D Curve details available on request

Residual Current Devices (RCDs) - For Human and Fire Protection



Use of **30mA RCDs** is now **mandatory** for all **domestic intallations** in India {CEA Amendment regulation 2015*}



Schneider Electric provides voltage independent RCDs which work on current sensing technology and provide protection from residual current even at extra low voltages (down to zero volts) and in case of break of neutral.



Schneider Electric offers SI RCD built to operate in electrically polluted or installation in aggressive environments:

- Flourescent / Variable lighting with Electronic ballast
- Powerful IT / Telecom equipment / Air conditioning
- Severe Atmosphere - High lighting risk / Swimming pools

* for Measures relating to Safety and Electric supply

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

AC Residual Current Circuit Breakers - xID



- Complies to standards IEC/EN 61008-1 and IS 12640
- AC Class protection
- Selective range available for time based discrimination
- Easy Monitoring: Earth fault indication and Test Button on front face
- Operating temperature up to +70°C
- Mandatory to use OF-S auxiliary to add any indication or tripping auxiliary

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	2	A9N16201	4449	4	A9N16251	6245
	100	2	A9N16203	4938	4	A9N16253	6636
	300	2	A9N16202	5088	4	A9N16252	6831
40	30	2	A9N16204	5236	4	A9N16254	6147
	100	2	A9N16205	5646	4	A9N16255	6673
	300	2	A9N16206	5921	4	A9N16256	6931
63	30	2	A9N16208	6305	4	A9N16258	7118
	100	2	A9N16209	6781	4	A9N16259	7884
	300	2	A9N16210	6918	4	A9N16260	7921
80	30	2	A9N16212	10601	4	A9N16261	12556
	100	2	A9N16213	10778	4	A9N16262	12758
	300	2	A9N16214	10979	4	A9N16263	12827

AC Residual Current Circuit Breakers (RCCBs) - ID



- Complies to standards IEC 61008-1 and VDE 0664
- AC Class protection
- Degree of pollution: 3 (suitable for industrial environment)
- Electrical ON/OFF indication by using OFSP auxiliary

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
4P	100	30	4	**A9R11491	16870
		100	4	**A9R12491	17771
	125	30	4	16905	51640
		100	4	16906	50279
		300	4	16907	50514

Note: **For 100A RCCB Auxiliary kindly contact Customer Care

AC Residual Current Breaker Overload (RCBO) - DPN N Vigi



- Complies to standards IEC/EN 61009
- AC Class Protection; Tripping characteristics - C curve
- Overvoltage category (IEC 60364): IV
- Suitable for indication & tripping auxiliaries

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
1P+N	6	30	2	A9N19661	7031
		300	2	A9N19681	7141
	10	30	2	A9N19663	7031
		300	2	A9N19683	7141
	16	30	2	A9N19665	7031
		300	2	A9N19685	7141
	20	30	2	A9N19666	7031
		300	2	A9N19686	7141
	25	30	2	A9N19667	7031
		300	2	A9N19687	7141
	32	30	2	A9N19668	7031
		300	2	A9N19688	7497
	40	30	2	A9N19669	8895
		300	2	A9N19689	9050

Note: Application specific RCDs also available with 10mA, 500mA and 1000mA sensitivities | Please contact nearest Schneider Electric Sales Office or Customer Care Center for Reference and Prices

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

SI Type Residual Current Circuit Breakers (RCCBs) - xID SI



- Complies to standard IEC/EN 61008-1
- SI RCCBs offer enhanced immunity against Electrical Disturbances; Polluted and Corrosive environments - Guaranteed performance in harsh operating conditions
- Ensures continuity of supply in networks with:
 - Transient overvoltages
 - Loads generating HF leakage current i.e. harmonics
 - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with:
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCCBs

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	2	A9N16234	10300	4	A9N16321	11479
40	30	2	A9N16237	10818	4	A9N16324	11841
63	30	2	A9N16240	11129	4	A9N16327	12158
	300	2	A9N16246	11213	4	A9N16334	12649

Vigi Block for xC60 (Add-on RCD Module, 2 & 4 Pole)



Suitable for
ComReady Auxiliary

- Flexibility to use MCB of any tripping curve to suit applications, ensuring best 3 in 1 protection
- No auxiliary supply required
- AC Class protection
- Degree of pollution: 3 (suitable for industrial environment)
- Immune to nuisance tripping due to transient over voltages

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	1.5	A9N26581	7284	3	A9N26595	8747
	100	1.5	A9N26582	9265	3	A9N26596	9433
	300	1.5	A9N26583	9796	3	A9N26597	10151
63	30	2	A9N26611	10184	3.5	A9N26643	10223
	100	2	A9N26612	10785	3.5	A9N26644	10617
	300	2	A9N26613	11297	3.5	A9N26645	11109

Note: Vigi Block for High Rating up to 125A (C120) and High Breaking Capacity (NG125) available on demand

SI Type Residual Current Breaker Overload (RCBO) - DPN N Vigi SI



Suitable for
ComReady Auxiliary



- Complies to standard IEC/EN 61009
- Ensures continuity of supply in networks with:
 - Transient overvoltages
 - Loads generating HF leakage current i.e. harmonics
 - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with:
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCCBs

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
1P+N	6	30	2	A9N19631	13997
		300	2	A9N19641	13997
	10	30	2	A9N19632	13997
		300	2	A9N19642	13989
	16	30	2	A9N19634	13997
		300	2	A9N19644	13997
	20	30	2	A9N19635	13997
		300	2	A9N19645	13997
	25	30	2	A9N19636	13997
		300	2	A9N19646	13997
	32	30	2	A9N19637	13997
		300	2	A9N19647	16658
	40	30	2	A9N19638	16573
		300	2	A9N19648	18443

*For prices, Please contact nearest Schneider Electric Sales Office or Customer Care Center and prices.


Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Common Auxiliaries for xC60 / C120 / RCDs Range

- Field-fittable auxiliaries (clip fitted) mounted on left side with maximum width of 54mm
- Order: Tripping Auxiliaries (MN first) followed by Indication Auxiliaries (SD first)

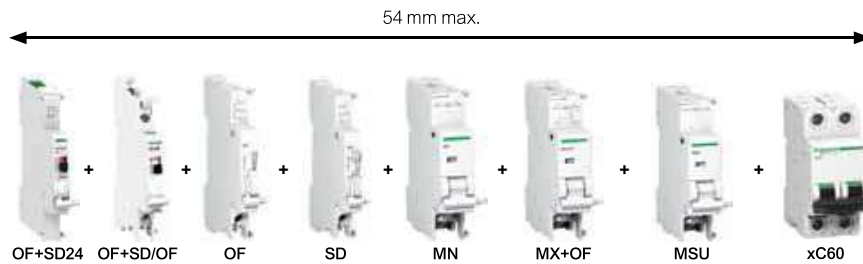

Type	Module Width 18mm/module	Reference	Unit MRP [₹]
Indication Auxiliaries			
OF Auxiliary Switch: for ON/OFF indications	0.5	A9N26924	1372
SD Alarm Switch: for Trip on fault indications	0.5	A9N26927	1612
OF + SD/OF Auxiliary switch	0.5	A9N26929	4279
OF+SD24 auxiliary contact (ComReady)	0.5	A9N26899	3586
Protection Auxiliaries – Trip Indication on front face			
MN Under-voltage Release 220-240V AC	1	A9N26960	5762
MSU Over-voltage Release 275V AC	1	A9N26500	6824
Tripping Auxiliaries – Trip Indication on front face			
MX + OF Shunt Release 110-415V AC: for Remote tripping of Circuit Breaker	1	A9N26946	3749
MX + OF Shunt Release 12-24V AC/DC: for Remote tripping of Circuit Breaker	1	A9N26948	3749
Auxiliary Switch for RCCBs – Mandatory for use of Auxiliaries with RCCBs			
Auxiliary switch for RCCB up to 80A (OF-S)	0.5	A9N26923	1832
Auxiliary switch for RCCBs 125A (OFSP)	0.5	16940	2785

Accessories



Type	Description	Reference	Unit MRP [₹]
Rotary Handle*	Breaker Switching Sub-Assembly	27046	5115
	Extended, Disconnectable handle	27047	3166
Padlock** (bag of 2)		26970	1231
Multicable terminal for 3 copper cables**		19096	9898
Aluminum cable terminal**		27060	752
Spacer		A9N27062	317

* for xC60, C120, DPN N Vigi, C60H-DC, xSW - Multi poles only

**for xC60, xID, DPN N Vigi, C60H-DC, xSW, C60PV-DC

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Protection Against Lightning Strikes And Switching Surges



For all low voltage switchboards and electrical enclosures:

Comprehensive range

- To ensure the protection of equipment connected to:
- Low voltage networks,
- Telecommunications networks,
- Computer networks.
- Easy to implement and use.
- Compatibility with all earthing systems (TT, TNS, TNC, IT).
- Technical and aesthetic consistency

Continuity of service and certified safety

Schneider Electric certified coordination between the surge arrester and its disconnection circuit breaker.

Compliance with standards: IEC/EN 61643-11.



More and more electrical equipment today is sensitive to overvoltages caused by lightning.



90%

of power outlets supply equipment incorporating electronic devices.



iQuick PRD “built-in” technology surge arresters, a Schneider Electric innovation, incorporate their own disconnection circuit breaker: easy to choose and simple to install for greater effectiveness.



Up to **30%** of installation time saved.

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Surge Arresters - Type 1+ 2



- Complies to IEC 61643-1 and EN 61643-11
- Withdraw able type: Easy Replacement
- Inbuilt SPD health Indicator: Also available with remote signaling
- For protection against Direct lightning surge, Indirect lightning surge, Switching surge
- Iimp up to 25kA & I_{max} upto 40kA
- **Always use a Back-up MCB with your SPD**
- Maximum Operating Voltage [U_c]: 350V

Type	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
PRD1 25r	1P	2	16329	18566
	1P + N	4	16330	40841
	3P	6	16331	61246
	3P + N	8	16332	76096

Surge Arresters iPRD- Type 2 (Withdrawable type) (TT, TN-S, TN-C Systems)



- In conformance with standards IEC 61643-11/2011 T2 and EN 61643-11 Type 2
- For protection against Indirect lightning surge and Switching surge
- Inbuilt health Indicator
- Response time < 25ns
- I_{max} (8/20 s): 65/40/15/8kA
- Maximum Operating Voltage [U_c]: 340V
- Level of protection, U_p: 1.0 - 2.0 kV
- Remote indication contact with 8r/20r/40r/65r
- **Always use a Back-up MCB with your SPD**

Type	Rated Voltage (V)	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
iPRD8	230	1P	1	A9L08100	5574
	230	1P+N	2	A9L08500	10423
	230/400	3P	3	A9L08300	14068
	230/400	3P+N	4	A9L08600	21234
iPRD8r	230	1P+N	2	A9L08501	12495
	230/400	3P+N	4	A9L08601	25481
iPRD20	230	1P	1	A9L20100	6247
	230	1P+N	2	A9L20500	13103
	230/400	3P	3	A9L20300	16773
iPRD20r	230/400	3P+N	4	A9L20600	23713
	230	1P+N	2	A9L20501	15582
	230/400	3P+N	4	A9L20601	28995
iPRD40	230	1P	1	A9L40100	7386
	230	1P+N	2	A9L40500	15090
	230/400	3P	3	A9L40300	21661
	230/400	3P+N	4	A9L40600	30205
iPRD40r	230	1P	1	A9L40101	8857
	230	1P+N	2	A9L40501	19454
	230/400	3P	3	A9L40301	29150
	230/400	3P+N	4	A9L40601	36252
iPRD65r	230	1P	1	A9L65101	11841
	230	1P+N	2	A9L65501	24794
	230/400	3P	3	A9L65301	32355
	230/400	3P+N	4	A9L65601	41982

Spare Cartridges for iPRD



- Spare Cartridges for iPRD8r, iPRD20r, iPRD40r and iPRD65r
- End of life indication available on front face
- These Cartridges are not compatible with Old SPD range (A9L16...)**

Type	Spare Cartridges for	Reference	Unit MRP [₹]
iPRD 65-350	iPRD65r	A9L65102	7413
iPRD 40-350	iPRD40, iPRD40r	A9L40102	5703
iPRD 20-350	iPRD20, iPRD20r	A9L20102	4571
iPRD 8-350	iPRD8, iPRD8r	A9L08102	4001
iPRD Neutral	All products (1P+N, 3P+N)	A9L00002	6001

**Spare Cartridges for Old SPD Range (A9L16...) are available on demand - please contact nearest Schneider Electric Sales Office or Customer Care for Reference and prices

Note: Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

iQuick PRD - Type 2 with inbuilt MCB



- Compact SPD with in-built back up MCB - saving on space, MCB selection, wiring time
- Compliance to EN 61643-11
- Withdrawable Type - Cost Efficient - Allows damaged Cartridges to be replaced without having to replace entire SPD
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available
- Incoming Protection: iQuick PRD 40r (High Risk level) and iQuick PRD 20r (Moderate Risk level)
- Secondary Protection: iQuick PRD 8r is cascade mounted with incoming surge arresters

Type	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
iQuick PRD 8r	1P+N	4	A9L16298	16010
	3P	6.5	A9L16299	22865
	3P+N	7.5	A9L16300	28451
iQuick PRD 20r	1P+N	4	A9L16295	18670
	3P	6.5	A9L16296	27448
	3P+N	7.5	A9L16297	34142
Quick PRD 40r	1P+N	4	A9L16292	21804
	3P	6.5	A9L16293	32666
	3P+N	7.5	A9L16294	40596

Note: Spare / Replacement Cartridges available - For Reference and prices contact nearest sales office or customer care

Photovoltaic surge arresters



- Protection for photovoltaic panels and the DC input to the inverter from overvoltages due to a lightning strike
- Type 2 surge arresters
- Should be installed in switchboard inside the building. If switchboard is located outside, it must be weatherproof
- Withdrawable surge arrester allows damaged Cartridges to be replaced quickly
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available

Type	U (cpv) Maximum Operating Voltage (V)	Module Width 18mm/module	Reference	Unit MRP [₹]
iPRD 40r	800	3	A9L40271	12416
	1000	3	A9L40281	14190

Note: Spare / Replacement Cartridges available - For Reference and prices contact nearest sales office or customer care

Surge Arresters for Communication Networks



- Analogue telephone line protection: iPRC surge arrester wired in series to the private installation input, protects the telephones, the modems (including ADSL) etc
- Protection for 2 low-current lines without common potential or 4 lines with common reference potential
- iPRI protects measuring instrument and PLC sensor inputs and the DC power supply inputs up to 53 V and AC power supply inputs up to 37 V

Type	[Ue] Operational Voltage (V)	Module Width 18mm/module	Reference	Unit MRP [₹]
PRI	48 V DC	1	A9L16339	22146
PRC	130 V AC	1	A9L16337	13543

Note: For all above Reference MOQ = 1

Isolator - xSW



- Complies to IEC/EN 60947-3
- Switching duty: AC-22
- Impulse voltage: 6kV
- DC application: 48V (110V with 2 poles in series)
- Short circuit withstand 20 In for 1 second
- Upto 80A Bi connect terminals & 100A to 125A with mono connect terminals

Poles Description	[In] Rated Current (A)	Module Width 18mm/module	MOQ	Reference	Unit MRP [₹]
2	40	2	6	A9S2P040	846
	63	2	6	A9S2P063	1118
	80	2	6	A9S2P080	1339
	100	2	6	A9S2P100	1938
	125	2	6	A9S2P125	2130
3	40	3	4	A9S3P040	1478
	63	3	4	A9S3P063	1731
4	40	4	3	A9S4P040	1872
	63	4	3	A9S4P063	2037
	80	4	3	A9S4P080	2702
	100	4	3	A9S4P100	3408
	125	4	3	A9S4P125	3767

Selector Switch - iSSW



- Complies to IEC 60947-5-1 and IEC 60669-1
- Rating 20A, 250V AC
- Electrical life (AC22): 30,000 cycles
- Connection: tunnel terminals cables up to 10 sq. mm

No. of positions	Poles Description	Contacts	Module Width 18mm/module	MOQ	Reference	Unit MRP [₹]
2	1	1 C/O	1	12	A9E18070	1810
	2	2 C/O	2	6	A9E18071	2488
		1NO + 1NC	1	12	A9E18072	1450
3	1	1 C/O	1	12	A9E18073	1744
	2	2 C/O	2	6	A9E18074	3002

iRO Buzzers



- Audible indication in housing and the tertiary sector
- Sound level of 70dBA at a distance of 60cm

Voltage	Module Width 18mm/module	Reference	Unit MRP [₹]
230V AC	1	A9A15322	2247
8..12V AC	1	A9A15323	1224

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

iCT Contactors



Suitable for
ComReady Auxiliary

- Complies with standards IEC 1095, E N 61095
- 4 operating modes switch on front face :
 - Automatic mode
 - Temporary "ON" mode
 - Permanent "ON" mode
 - Shutdown
- Mechanical contact position Indicator
- Safe installation maintenance: lock the contactor in ON position
- Silent operation (20dB) for entire range

Type	Rating (A)	No. of Contacts	Module Width 18mm/module	Reference	Unit MRP [₹]
1P	25	1NO	1	A9C20731	2667
	16	2NO	1	A9C22712	2745
2P	25	2NO	1	A9C20732	3282
	40	2NO	2	A9C20842	6688
	63	2NO	2	A9C20862	7174
3P	25	3NO	2	A9C20833	4228
	40	3NO	2	A9C20843	9388
	63	3NO	3	A9C20863	10203
4P	25	4NO	2	A9C20834	4428
	40	4NO	2	A9C20844	10934
	63	4NO	3	A9C20864	11536
	63	2NO + 2NC	3	A9C20868	12851

Note: 100A Contactor in 2P / 4P - available on request

iTL Impulse Relays



Suitable for
ComReady Auxiliary

- Complies with standards IEC/EN 60669-2-2
- Safe maintenance: disconnection of remote control by selector switch
- Manual Controls on front face: 0-I toggle
- Mechanical contact position Indicator
- Maximum 5 operations/min. and 100 switching operations/day
- Degree of pollution: 3 (suitable for industrial environment)

Type	Rating (A)	Control Voltage	No. of Contacts	Module Width	Reference	Unit MRP [₹]
1P	16	230-240 VAC	1NO	1	A9C30811	1729
	32	230-240 VAC	1NO	1	A9C30831	2176
2P	16	230-240 VAC	2NO	1	A9C30812	2835
	32	230-240 VAC	2NO	1	A9C30831 + A9C32836	6,727
3P	16	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30811 + A9C32816	5380
	32	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30831 + 2* x A9C32836	11278
4P	16	230-240 VAC	4NO	2	A9C30814	5871
	32	230-240 VAC	4NO	2	A9C30831 + 3* x A9C32836	15829

iIL Indicator Lights



- Complies with standard IEC 60947-5-1
- Indicator light with LED technology
- Service life 100,000 hours with constant luminous efficiency

Type	Colour	Module Width 18mm/module	Reference	Unit MRP [₹]
Single Indicator light	Red	1	A9E18320	1788
	Green	1	A9E18321	1788
	Blue	1	A9E18323	1788
	Orange	1	A9E18324	1788
3 phase voltage presence light	Red/Red/Red	1	A9E18327	5166
Single Push Button (1 NO+ 1NC)	Grey	1	A9E18033	2408

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Smartlink



- Compliance to IEC/EN 61131-2
- Protection Monitoring – Device Status and alarm notifications
- Load Control / Switching through Contactors and Impulse Relays
- Energy Monitoring through pulse meters
- Alarm over email and analog sensors (temperature / humidity) with Smartlink Ethernet
- Plug & Play – Pre fabricated cables and in built web pages
- Rated Voltage: 24V DC

Description	Reference	Unit MRP [₹]
Smartlink EL-D	A9XELC10	29980
Wiser Energy Module IP	EER31800	29980

Communication Auxiliaries



Auxiliary for Protection Devices (OF+SD24)

Auxiliary for Contactors (iACT24)

Auxiliary for Impulse Relays (iATL24)

Description	Module Width	Reference	Unit MRP [₹]
OF+SD24	0.5	A9N26899	3586
iACT24	1	A9C15924	17842
iATL24	1	A9C15424	18787

Acti 9

Description	Reference	Pack	Unit MRP [₹]
Distribloc 63A			
Distribution from the top (4 Module)	04040	1	15571
Distribution through the bottom (4 Module)	04041	1	15571

Reflex iC60 - Integrated Control & Overcurrent Protection Device



- All in One Solution: MCB + Contactor + Impulse Relay + Auxiliary
- 10kA Breaking capacity as per IEC/EN 60947-2,
- Ti24 interface: Connection to PLC, Smartlink
- 3 operating modes to cater to a variety of applications
- Safe lock down with Integrated Padlocking
- Simplified maintenance: Front face Indicator allows better reliability

[In] Rated Current (A)	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width **	4.5 mod		5.5 mod		6.5 mod	2275
B Curve						
10	A9C61210	49082	A9C61310	51257	A9C61410	54948
16	A9C61216	49076	A9C61316	51257	A9C61416	54948
25	A9C61225	49076	A9C61325	51257	A9C61425	54948
40	A9C61240	50701	A9C61340	54818	A9C61440	58347
63	A9C61263	53926	A9C61363	56954	A9C61463	61661
C Curve						
10	A9C62210	49632	A9C62310	52825	A9C62410	56074
16	A9C62216	49632	A9C62316	52830	A9C62416	56074
25	A9C62225	49626	A9C62325	52825	A9C62425	56074
40	A9C62240	52268	A9C62340	54844	A9C62440	58385
63	A9C62263	55077	A9C62363	56954	A9C62463	61666
D Curve						
10	A9C63210	50752	A9C63310	53898	A9C63410	58327
16	A9C63216	50752	A9C63316	53898	A9C63416	58327
25	A9C63225	50752	A9C63325	53898	A9C63425	58327

Note: **18mm/module

Please contact Customer Care Center for Stockable and Non stockable status of references.


NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Isobar Distribution System

EcoStruxure™ Innovation At Every Level

From sensors to services, our Innovation At Every Level approach improves energy and operational efficiency by tapping the true business value of IoT advancements. We've made mobility, sensing, cloud, analytics, and cyber security technologies meaningful to customers, helping them compete in our IoT economy.



70%
of decision-makers see the business value of IoT*

*Schneider Electric IoT 2020 Business Report

Connected Products:


The Internet of Things starts with the best things. Our IoT-enabled best-in-class connected products include breakers, drives, UPSs, relays, sensors, and more. Devices with embedded intelligence drive better decision-making throughout operations.

Edge Control:

Mission-critical scenarios can be unpredictable, so control of devices at the edge of the IoT network is a must. This essential capability provides real-time solutions that enable local control at the edge, protecting safety and uptime.

Applications, Analytics, and Services:

Interoperability is imperative to supporting the diverse hardware and systems in building, data center, industry, and grid end markets. EcoStruxure™ enables a breadth of agnostic applications, analytics, and services for seamless enterprise integration.

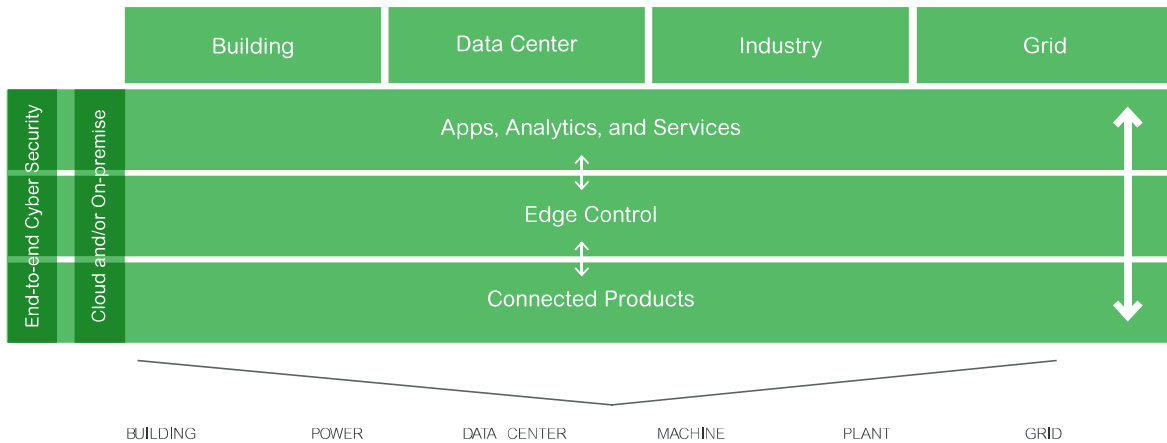

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Connectivity built in

Acti9 Isobar harnesses the connectivity of the Acti9 range enabling distribution boards to become smart and connected.

- 1. Enable asset management** on all outgoing ways with **PowerTag**
- 2. Smartlink SiD** for wireless data concentration
- 3. Enable further asset and energy management** through PowerTag for Compact NSX
- 4. Monitor and control** your assets with SiB Smartlink
- 5. See the power and optimise the use** of your assets with Facility Expert our **simple on-line services platform**


Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Acti 9

Isobar Pan Assembly

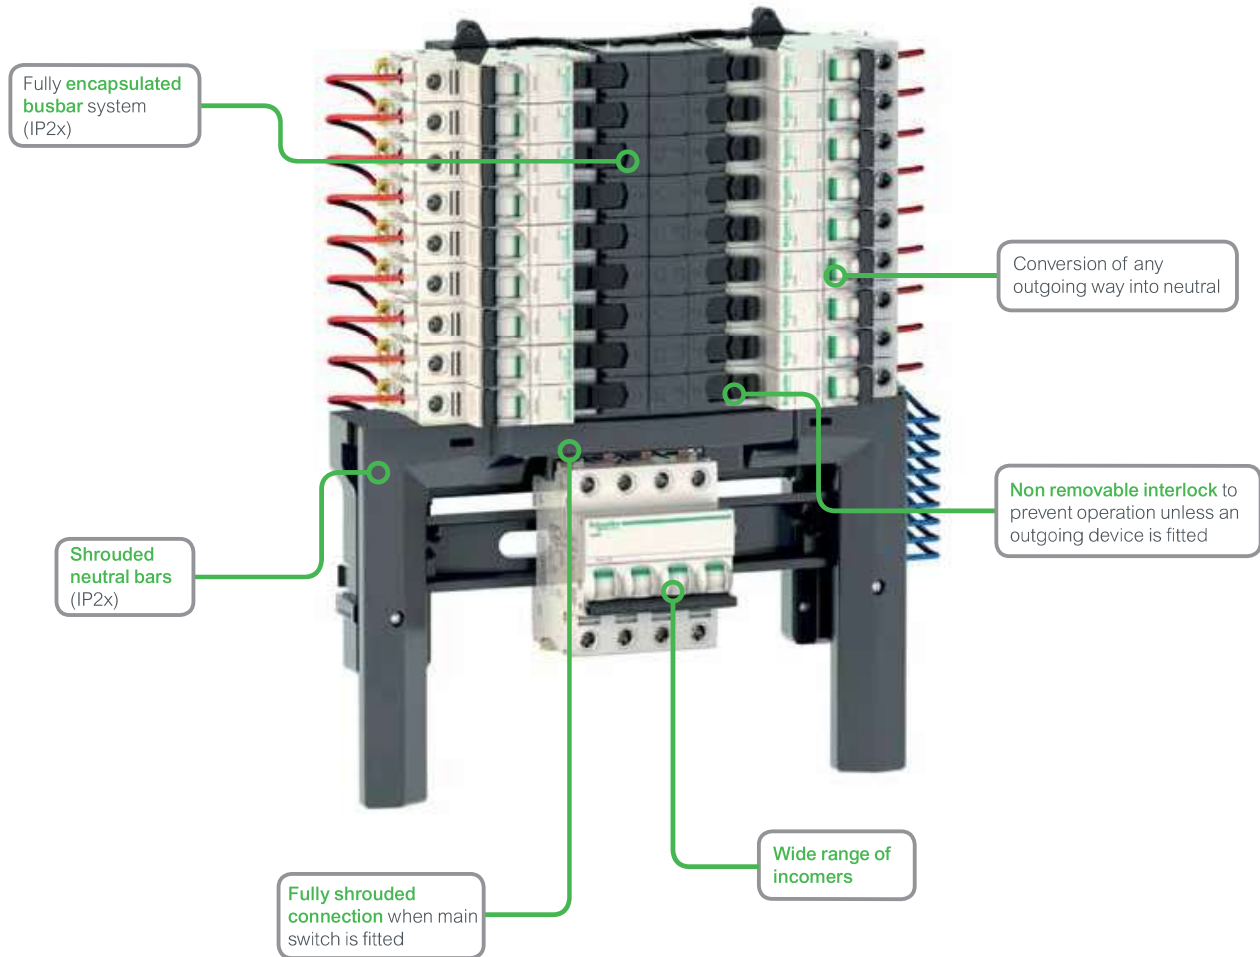

- Fully type tested conditional short circuit rating of 25kA to BS EN 61439-3
- High performance MCB 10kA BS EN 60898 15kA BS EN 60947-2 in B, C or D curve 1, 2, 3, 4 pole
- 250A busbar rating
- Isobar disconnection to BS EN 60947-3 ensuring unused outgoing ways are isolated
- Option of switching outgoing neutral on all boards using distributed neutral kit
- Range of incomers: switch disconnectors, residual current devices, terminal blocks, mccb
- Single pole RCBO for new or retrofit maintaining device density
- Full range of device accessories and auxiliaries
- Shrouded Neutral
- Convention of any outgoing way into Neutral

Description	Double Door Metal (IP43) Reference	Unit LP [₹]
Acti9 Isobar B - pan assembly - 16 ways TP + earth + neutral	SEA9BN16PEV	*
Acti9 Isobar B - pan assembly - 18 ways TP + earth + neutral	SEA9BN18PEV	*
Acti9 Isobar B - pan assembly - 24 ways TP + earth + neutral	SEA9BN24PEV	*
Acti 9 - 1P blank terminal block (no electrical connection)	SEA9BP	*
Isobar B - neutral bar - 1N - for distribution board - 16 ways	SEA9NB16	*
Isobar B - neutral bar - 1N - for distribution board - 18 ways	SEA9NB18	*
Isobar B - neutral bar - 1N - for distribution board - 24 ways	SEA9NB24	*
Isobar A - neutral bar - 1N - for distribution board - 4 ways SP+N	SEA9NKIT	*
Acti 9 - terminal block - 250A	SEA9NPB250TB	*
Acti 9 Isobar B - MCCB/Interpact connection kit	SEA9BINCKIT	*

* - Price on Request

Please contact Schneider Electric Customer Care Center for Prices

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Acti 9

Distribution Boards

Spectacular Design

Blends seamlessly with interiors



Unique Rounded Corners | Color - RAL 9003 white | Designer Rotary Knob

Maximized Wiring Space

Convenient and Safe wiring




Side mounted N-bar and E-bar

Removed all injurious sharp corners

15% more wiring area | Reduced U-box Collar | Removable Frame, Centre plate & Gland plate

Adaptable

Total Flexibility for ease of installation and usage

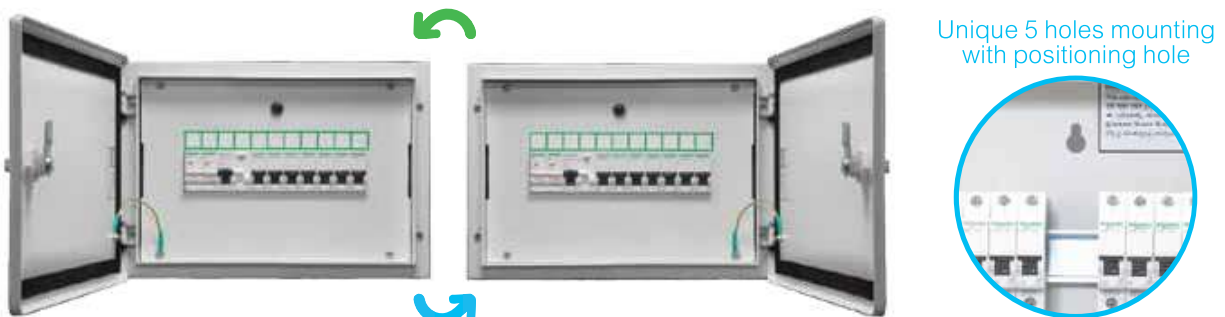

Unique 5 holes mounting with positioning hole

Surface and Flush installation | Field fittable key lock provision | Reversible Door

Inspiring the **S.M.A.R.T.** choice!!!

Robust Architecture

Perfect blend of Strength & Weight




High Strength-to-Weight ratio | RoHS and REACH Compliance – ideal solution for GREEN Buildings

NEW

Base Material used - Galvanized Iron

4X Rust Resistance



1. Powder Coating
- 2. Galvanized Iron**
3. Base Iron

Galvanized Iron | Gives 4X rust resistance
No Rusting | Even if the powder coating is scratched
No Propagation Of Rust | Even If base material is chipped off
No Hassle | of repainting due to rusting

Inspiring the **S.M.A.R.T.** choice!!!

Technically Proven

Safety Guaranteed



Designed and Manufactured as per **IS 8623 - 1 & 3** | IP and IK test by ERDA & CPRI | Glow wire tested

Type Tested as per IEC 61439 - 1 & 3

NEW



IEC 61439 - 3* Fully Compliant

*Tested at **NABL** and **ASTA** accredited testing facility



Salt Spray




IP43



IK09



Reliable Door



Earthing



Temp@
Max Curr

Mechanical Tests

Electrical Tests



Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Acti 9

Distribution Boards

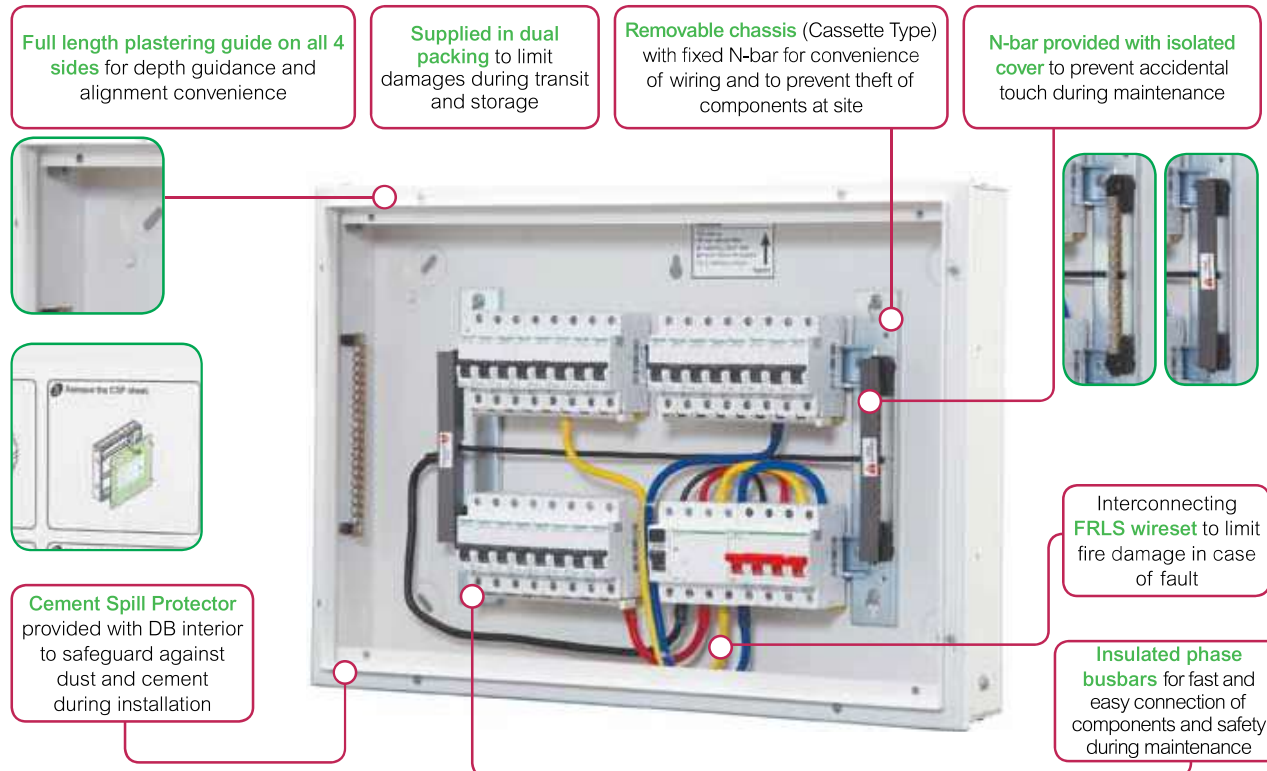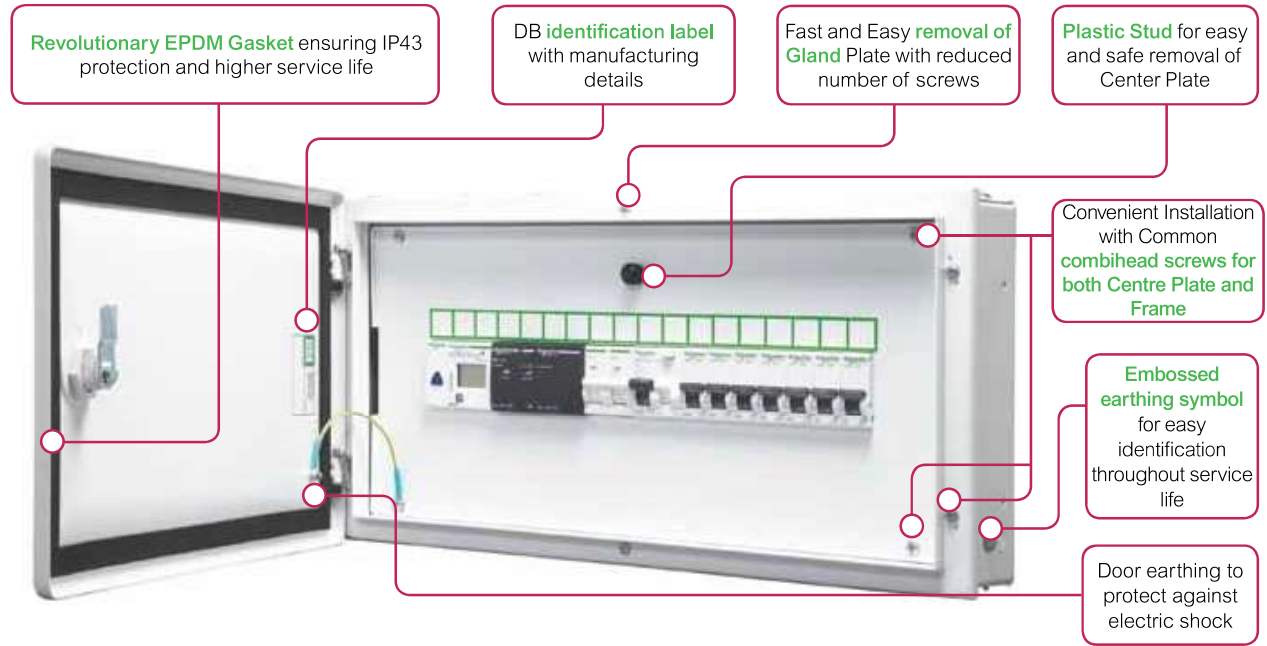

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Metal Enclosures



- Metal Enclosure to mount individual Modular Device feeding directly to the load or final distribution board

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
2 way	1 / 2	A9HMES02 <input checked="" type="checkbox"/>	1009	-	-
4 way	3 / 4	A9HMES04 <input checked="" type="checkbox"/>	1009	-	-

SPN DBs



- SPN DB for distribution of Single Phase Neutral supply to respective load MCBs
- Incomer - DP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
6 way	6	A9HSNS06	1954	A9HSND06 <input checked="" type="checkbox"/>	2808
8 way	8	A9HSNS08 <input checked="" type="checkbox"/>	2317	A9HSND08 <input checked="" type="checkbox"/>	3060
12 way	12	A9HSNS12	2743	A9HSND12 <input checked="" type="checkbox"/>	3680
18 way	18	A9HSNS18	3771	A9HSND18 <input checked="" type="checkbox"/>	4930

TPN DBs



- Standard TPN DBs for distribution of Three Phase and Neutral supply
- Incomer - FP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs
- TPN DBs can be converted to PPI DB using 'PPI Kit' provided on next page

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
4 way eco	4 + 12	-	-	A9HTND04E <input checked="" type="checkbox"/>	6035
4 way	8 + 12	A9HTNS04	5603	A9HTND04 <input checked="" type="checkbox"/>	6087
6 way	8 + 18	A9HTNS06	*	A9HTND06 <input checked="" type="checkbox"/>	7497
8 way	8 + 24	A9HTNS08	7639	A9HTND08 <input checked="" type="checkbox"/>	9245
12 way	8 + 36	A9HTNS12	11513	A9HTND12 <input checked="" type="checkbox"/>	14115

Flexi Tier DBs



- Flexi DBs give total flexibility to mount any type and size of Modular devices as per load requirement
- Provided with N-Bar and E-Bar
- Flexi Tier DBs can be converted to PPI DB using 'PPI Kit' provided on next page

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
2 Tier 24 Modules	2 x 12	-	-	A9HFD224	7917
3 Tier 36 Modules	3 x 12	-	-	A9HFD336	9509
4 Tier 40 Modules	4 x 10	-	-	A9HFD440 <input checked="" type="checkbox"/>	10045
4 Tier 56 Modules	4 x 14	-	-	A9HFD456 <input checked="" type="checkbox"/>	10499

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.


NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Acti 9

Distribution Boards

New Phase Segregated DBs

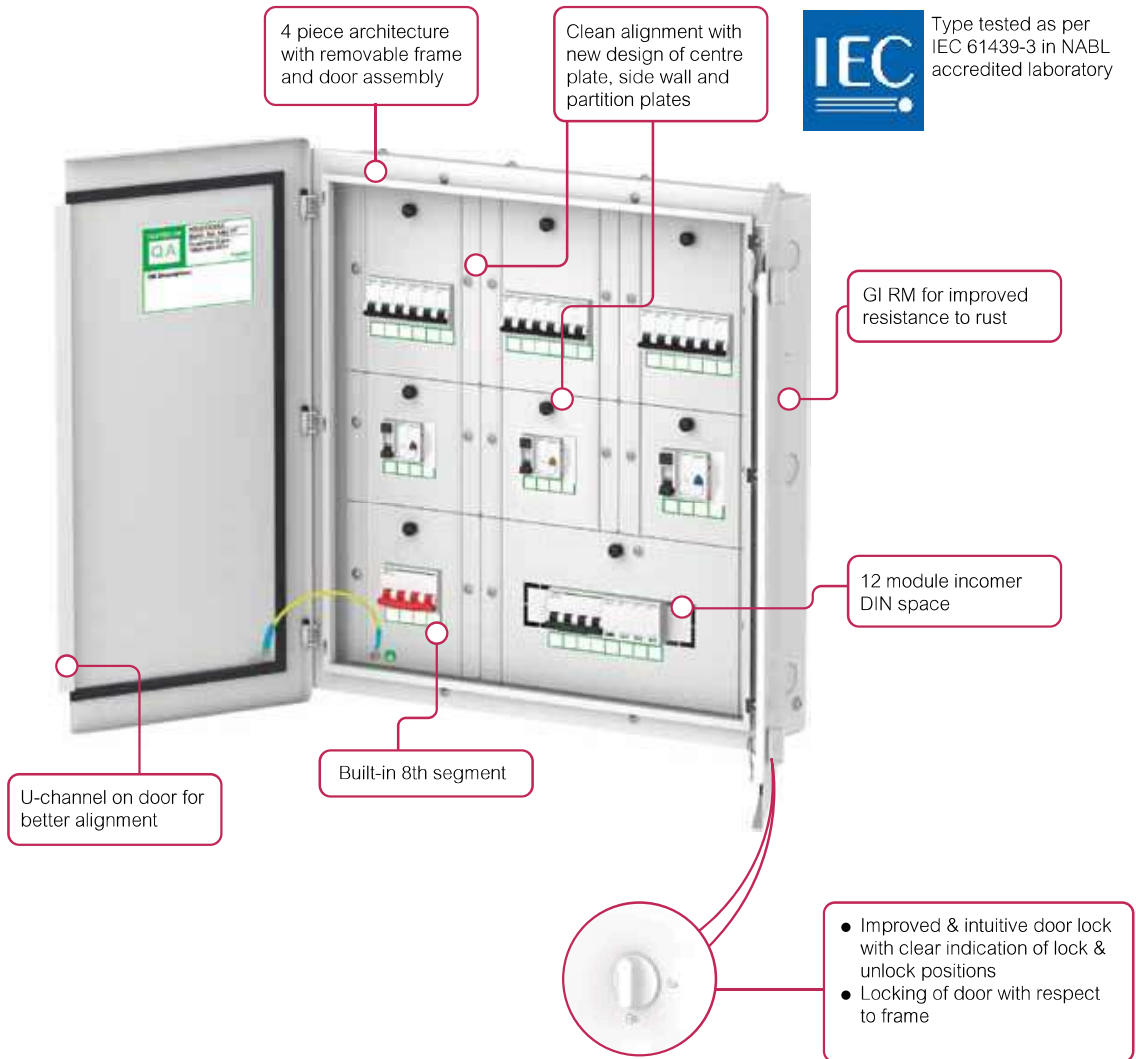

Key highlights

- 1 New compact design
- 2 Robust architecture
- 3 Type-tested system
- 4 4 piece construction
- 5 Built-in 8th segment
- 6 Split door for all variants
- 7 Clean alignment of doors, centerplates
- 8 Improved door locking
- 9 High rust resistance with GI
- 10 Increased incomer DIN space

Please Contact nearest Schneider Electric Sales Office and Customer Care Center for your reference.

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Per Phase Isolation DBs

- PPI DBs to mount DP Residual Current Device (RCD) at an individual phase level to isolate the faulty phase in case of earth leakage and ensure continuity of supply to other healthy phases
- Incomer - Modular (FP MCB/Isolator) using PPI Kit / MCCB100A (TP/FP Compact NSX or EasyPact CVS)
- Sub-Incomer - DP RCCB/RCBO
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
12 way	100A MCCB + 6 + 30	-	-	A9HPID12M	20937

PPI Kit (to convert TPN and Flexi Tier DBs to PPI DB)



- Set of accessories to convert TPN DBs and 4 tier Flexi DBs to PPI DB
- Kit is provided with additional required quantity of N-Bar, wire set, Busbars (only for Flexi Tier) and Mounting Kit (only for TPN)

Description	Reference	Unit MRP [₹]
PPI Kit for 6way TPN DB (2+4w PPI DB)	A9HKIT04 <input checked="" type="checkbox"/>	4114
PPI Kit for 8way TPN DB (2+6w PPI DB)	A9HKIT06 <input checked="" type="checkbox"/>	4818
PPI Kit for 12way TPN DB (2+10w PPI DB)	A9HKIT10 <input checked="" type="checkbox"/>	5310
PPI Kit for 4T40M Flexi DB (2+8w PPI DB)	A9HKIT08 <input checked="" type="checkbox"/>	8519
PPI Kit for 4T56M Flx DB (2+12w PPI DB)	A9HKIT12 <input checked="" type="checkbox"/>	9432

Phase Segregated DBs



- Phase Segregated DBs to provide total safety for installer and maintenance personnel, by compartmentalizing each Phase and separating Incomer, Sub-Incomer and Outgoing
- Offers better continuity of supply in case of faults during maintenance at DB level.
- Incomer - Modular (FP MCB/Isolator) / MCCB 100A (TP/FP during maintenance Compact NSX or EasyPact CVS)
- Sub-Incomer - DP RCCB/RCBO
- Outgoing - SP MCBs
- GI sheet ensures improved rust resistance
- Type-tested system conforming IEC 61439-3
- Built-in 8th segment (for modular incomer only)
- Increased incomer DIN space of 12M for 6 ways to 12 ways
- Split door for all variants
- New design ensures clean alignment of doors, centerplates
- 4 piece architecture with removable frame
- Improved, intuitive door lock design with clear indication of lock and unlock positions

Description	Total Module Cutout (Incomer + Sub-incomer + Outgoing)	Single Door (IP30) Reference	Double Door Metal (IP43) Reference	Unit MRP [₹]
4 way	8 + 12 + 12 + 4	-	A9HPSG04	16604
6 way	8 + 12 + 18 + 4	-	A9HPSG06	18539
8 way	8 + 12 + 24 + 4	-	A9HPSG08	23274
12 way	8 + 12 + 36 + 4	-	A9HPSG12	31405
12 way with MCCB l/c	100A MCCB + 12 + 36	-	A9HPSG12M	-

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

VTPN DBs for Modular Incomer



- Ideal solution to distribute power supply to both 3 Phase and 1 Phase loads in the same DB
- Incomer - FP RCCB / RCBO / Isolator / MCB
- Outgoing - SP MCBs / TP MCBs
- 65% more Incomer Wiring Space.
- New Compact Fishbone with better Thermal Performance
- Short Circuit Withstand – 17 kA for 250mS (100 A)/ 25 kA (250 A) for 500mS
- Secure Connections with Fixed Spreader links
- IP 2X protection at Incomer with new shrouds
- Type tested as per IEC 61439 – 3 in NABL accredited Lab
- Knockout size for Incomer increased to 50mm (to accommodate Aluminium Cable)

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
4 way	12 + 12	-	-	A9HVM04	Coming Soon
8 way	12 + 24	-	-	A9HVM08	
12 way	12 + 36	-	-	A9HVM12	

VTPN DBs for MCCB Incomer



- DBs for higher incoming current distribution up to 250A
- Incomer - TP/FP Compact NSX or EasyPact CVS MCCB up to 250A
- Outgoing - SP MCBs / TP MCBs
- 65% more Incomer Wiring Space.
- New Compact Fishbone with better Thermal Performance
- Short Circuit Withstand – 17 kA for 250mS (100 A)/ 25 kA (250 A) for 500mS
- Secure Connections with Fixed Spreader links
- IP 2X protection at Incomer with new shrouds
- Type tested as per IEC 61439 – 3 in NABL accredited Lab
- Knockout size for Incomer increased to 50mm (to accommodate Aluminium Cable)

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
4 way	100A MCCB + 12	-	-	A9HVN04L	Coming Soon
8 way	100A MCCB + 24	-	-	A9HVN08L	
12 way	100A MCCB + 36	-	-	A9HVN12L	
4 way	160A MCCB + 12	-	-	A9HVN04M	
8 way	160A MCCB + 24	-	-	A9HVN08M	
12 way	160A MCCB + 36	-	-	A9HVN12M	
8 way	250A MCCB + 24	-	-	A9HVN08H	
12 way	250A MCCB + 36	-	-	A9HVN12H	

ComReady DBs



- Designed to house Acti 9 communication system
- Supplied with Double DIN rail, E-Bar and Wire channel.
- Accessories to convert Flexi Tier DB into ComReady DB available on request

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
1 Tier 24 Modules	24	-	-	A9HCRD124	11669
2 Tier 48 Modules	48	-	-	A9HCRD248	18038

Please contact Customer Care Center for Stockable and Non stockable status of references.

✔ NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Metal Clad P&S Units



- Plug & Socket Unit with Electra Plug & Socket and provision to mount modular protection devices to feed the end load directly

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
10A 1P+N+E P&S	2	A9HMS210	2568	-	-
20A 1P+N+E P&S	2	A9HMS220	2749	-	-
30A 3P+E P&S	3	A9HMS330	6016	-	-

Industrial P&S Units (provision to mount PratiKa Sockets)



- Plug & Socket Unit with provision to mount PratiKa straight / angled* socket and modular protection devices to feed the end load directly

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
16A 3P PK P&S	2	A9HKS316	2374	-	-
32A 3P PK P&S	2	A9HKS332	3921	-	-
32A 5P PK P&S	4	A9HKS532	4645	-	-
63A 5P PK P&S	4	A9HKS563	9380	-	-

Locks for Acti 9 DBs



Key Lock*

Description	Reference	Unit MRP [₹]
New Rotary Lock**	A9HRL901	742

Note: **Use New Rotary lock reference A9HRL901 for:
Acti9 DBs manufactured September 2020 onwards
Acti9 DBs with lock & unlock symbol on door .

*Contact SE Sales for more info on Key Lock

Accessories for Distribution Boards

Description	Reference	Unit MRP [₹]
Busbars		
Fork Busbar 1P 12MOD. 63A	R9XFH112	1004
Fork Busbar 1P 57MOD. 63A	R9XFH157	2234
Fork Busbar 2P 12MOD. 63A	R9XFH212	1157
Fork Busbar 2P 57MOD. 63A	R9XFH257	4285
Fork Busbar 3P 12MOD. 63A	R9XFH312	2612
Fork Busbar 3P 57MOD. 63A	R9XFH357	9348
Fork Busbar 4P 12MOD. 63A	R9XFH412	2409
Fork Busbar 4P 57MOD. 63A	R9XFH457	10061
Busbar Accessories		
Set of 10 End Caps 1P	R9XE110	*
Set of 10 End Caps 2P	R9XE210	*
Set of 10 End Caps 3P	R9XE310	1056
Set of 10 End Caps 4P	R9XE410	*
Set of 4 Connector Fork 63A	R9XFC04	*
Set of 20 Tooth Caps	R9XT20	1294
Blanking Plate	13229B	52

Note: Blanking Plate MOQ = 10, All other MOQ = 1

Customized Distribution Boards to Suit Your Need - Available on Request*

- TV/Telephone DBs
- Pre-Wired DBs
- 8 Segment DBs
- Acrylic Door DBs
- IP54 DBs
- DBs with Phase Indication Lamps

*upto 32A socket only

Note: For all above Reference MOQ = 1

Note: * Please contact nearest Schneider Electric Sales Office or Customer Care Center for coordination chart

Kaedra enclosures for PratiKa industrial sockets are part of a complete system of Watertight enclosures from 16A to 125A providing solutions for protection, control and electrical distribution for tertiary and industrial applications



- Degree of protection - IP65
- Impact strength - IK09
- Resistant to chemical and atmospheric agents, UVs etc.
- Self extinguishing class 2 insulating material
- Flame and abnormal heat resistance: 650°C
- Reversible front face for opening of door to left/right
- Combining of enclosures horizontally/vertically while still maintaining IP
- DIN channel can be positioned in 2 depths & 2 heights for cabling purpose

Mini Enclosures for modular devices



Description	Reference	Unit MRP [₹]
4 module	13441 <input checked="" type="checkbox"/>	3783
6 module	13442	4306
8 module	13443	5071
12 module	13444	8147

Enclosures for modular devices (with terminal blocks)



Description	Reference	Unit MRP [₹]
1 row 12 module	13431	8991
1 row 18 module	13432	11850
2 row 24 module	13433	13457
2 row 36 module	13434	17035
3 row 36 module	13435	17763
4 row 72 module	13437	33904

Mini Enclosure (suitable to mount modular devices and PratiKa 16A socket)



Description	Reference	Unit MRP [₹]
4 module 1 vertical opening	13175 <input checked="" type="checkbox"/>	1805
4 module 2 horizontal opening	13176	2226
4 module 3 horizontal opening	13177	2802

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Enclosure (suitable to mount modular devices and PratiKa 16A / 32A sockets)



Description	Reference	Unit MRP [₹]
5 module 2 opening	13178 <input checked="" type="checkbox"/>	4344
8 module 4 horizontal opening	13179	5929
13 module 3 opening	13180	7835
13 module 6 opening	13181	8613
19 module 8 opening	13182	11100

Functional Plaques



Description	Reference	Unit MRP [₹]
Blank - marked for 1 socket 50x50	13135	562
Blank - marked for 1 socket 65x65 or 75x75	13137	562
Intermediate with 65x85 opening	13136	685
Intermediate with one opening for 65x85 & 90x100	13142	1136

Note: For all above Reference MOQ = 1

Wander Plugs



PKE16M423

PKE16M723

81383

- Conforms to IEC 60309-1 & IEC 60309-2
- PK PratiKa Screw Connect: same orientation of clamp's screws
- External impact strength: IK08
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
PratiKa Screw				
IP44				
16	200...250	2P + E	PKE16M423 <input checked="" type="checkbox"/>	545
		2P + E	PKX16M423 <input type="checkbox"/>	1102
	380...415	3P + E	PKE16M434 <input checked="" type="checkbox"/>	690
		3P + N + E	PKE16M435 <input checked="" type="checkbox"/>	719
32	200...250	2P + E	PKE32M423 <input checked="" type="checkbox"/>	858
	380...415	3P + E	PKE32M434	995
		3P + N + E	PKE32M435 <input checked="" type="checkbox"/>	981
IP67				
16	200...250	2P + E	PKE16M723 <input checked="" type="checkbox"/>	1191
		2P + E	PKX16M723 <input type="checkbox"/>	1752
	380...415	3P + E	PKE16M734	1345
		3P + N + E	PKE16M735	1438
32	200...250	2P + E	PKE32M723	1685
	380...415	3P + E	PKE32M734 <input checked="" type="checkbox"/>	1818
		3P + N + E	PKE32M735 <input checked="" type="checkbox"/>	1831
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81378	4776
	380...415	3P + E	81382 <input checked="" type="checkbox"/>	4554
		3P + N + E	81383 <input checked="" type="checkbox"/>	4560
125	200...250	2P + E	81390	12197
	380...415	3P + E	81394	13929
		3P + N + E	81395	13929

Note: * Fast Connection

Small Wall Mounted Sockets



PKF16W423

PKF16W723

PKF32W735

- Conforms to IEC 60309-1 & IEC 60309-2
- External impact strength: IK08
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
IP44				
16	200...250	2P + E	PKF16W423	954
		3P + E	PKF16W434	1107
	380...415	3P + N + E	PKF16W435	1209
32	200...250	2P + E	PKF32W423	1247
	380...415	3P + E	PKF32W434	1497
		3P + N + E	PKF32W435	1580
IP67				
16	200...250	2P + E	PKF16W723	1516
	380...415	3P + E	PKF16W734	1904
		3P + N + E	PKF16W735	1969
32	200...250	2P + E	PKF32W723	1896
	380...415	3P + E	PKF32W734	2770
		3P + N + E	PKF32W735	3674

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Wall Mounted Sockets



81178

81183

- Conforms to IEC 60309-1 & IEC 60309-2
- Rated operational voltage upto 415V
- Rated operational current upto 125A
- External impact strength: IK08
- Glow wire test: 850°C
- Available only in IP67

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
63	200...250	2P + E	81178	5884
		3P + E	81182 ●	6056
	3P + N + E	81183	6142	
125	200...250	2P + E	81190	21029
		3P + E	81194	21220
	3P + N + E	81195	21324	

Wander Sockets



PKF16M423

81483

PKF32M735

- PK PratiKa Screw Connect: same orientation of clamp's screws.
- PK PratiKa: 16A & 32A; IP44 & IP67
- External impact strength: IK08
- Glow wire test: 850 °C
- Conforms to IEC 60309-1 & IEC 60309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
PratiKa Screw				
IP44				
16	200...250	2P + E	PKF16M423 ☑	755
		2P + E	PKY16M423	832
	380...415	3P + E	PKF16M434	871
		3P + N + E	PKF16M435	950
32	200...250	2P + E	PKF32M423 ☑	1038
	380...415	3P + E	PKF32M434	1259
		3P + N + E	PKF32M435 ☑	1268
IP67				
16	200...250	2P + E	PKF16M723	1397
		2P + E	PKY16M723 ●	1700
	380...415	3P + E	PKF16M734	1752
		3P + N + E	PKF16M735	1831
32	380...415	2P + E	PKF32M723	1922
		3P + E	PKF32M734	2126
		3P + N + E	PKF32M735	2146
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81478	5202
		3P + E	81482	5248
	380...415	3P + N + E	81483	5333
125	200...250	2P + E	81490	19921
		3P + E	81494	16423
	380...415	3P + N + E	81495	16744

Also Available on Request:

- Patented FAST connect Plugs & Sockets - innovative cabling system that enables connection without stripping the conductor and with absolutely no screws required
- Extra Low Voltage Plugs & Sockets down to 50V

Please contact nearest Schneider Electric Sales Office or Customer Care for Reference and Prices

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

☑ NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Panel Mounted Sockets - Angled



PKF16F423

PKF32F723

81283

- PK PratiKa Screw Connect: same orientation of clamp's screws
- External impact strength: IK08
- Glow wire test: 850°C
- Conforms to IEC 60309-1 & IEC309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
PratiKa Screw				
IP44				
16	200...250	2P + E	PKF16F423 <input checked="" type="checkbox"/>	584
		2P + E	PKY16F423 <input type="checkbox"/>	630
	380...415	3P + E	PKF16F434	871
		3P + N + E	PKF16F435 <input checked="" type="checkbox"/>	928
32	200...250	2P + E	PKF32F423 <input checked="" type="checkbox"/>	1038
	380...415	3P + E	PKF32F434	1204
		3P + N + E	PKF32F435	1199
IP67				
16	200...250	2P + E	PKF16F723 <input checked="" type="checkbox"/>	1100
		2P + E	PKY16F723 <input type="checkbox"/>	1332
	380...415	3P + E	PKF16F734	1253
200...250		3P + N + E	PKF16F735 <input checked="" type="checkbox"/>	1268
32	200...250	2P + E	PKF32F723	1431
		3P + E	PKF32F734	1673
	380...415	3P + N + E	PKF32F735	1700
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81278	4697
		3P + E	81282 <input checked="" type="checkbox"/>	4705
	380...415	3P + N + E	81283 <input checked="" type="checkbox"/>	4797
125	200...250	2P + E	81290	15445
		3P + E	81294	15846
	380...415	3P + N + E	81295	15924

Panel Mounted Sockets - Straight



PKF16G423

PKF16G723

81683

- PK PratiKa Screw Connect: same orientation of clamp's screws
- External impact strength: IK08
- Glow wire test: 850°C
- Conforms to IEC 60309-1 & IEC309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
PratiKa Screw				
IP44				
16	200...250	2P + E	PKF16G423	661
		2P + E	PKY16G423	826
	380...415	3P + E	PKF16G434	1154
		3P + N + E	PKF16G435	995
32	200...250	2P + E	PKF32G423	1050
	380...415	3P + E	PKF32G434	1209
		3P + N + E	PKF32G435	1310
IP67				
16	200...250	2P + E	PKF16G723	1107
		2P + E	PKY16G723 <input type="checkbox"/>	1247
	380...415	3P + E	PKF16G734	1522
3P + N + E		PKF16G735	1268	
32	200...250	2P + E	PKF32G723	1411
		3P + E	PKF32G734	1589
	380...415	3P + N + E	PKF32G735	1648
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81678	5684
		3P + E	81682	4751
	380...415	3P + N + E	81683	4751
125	200...250	2P + E	81690	15747
		3P + E	81694	15846
	380...415	3P + N + E	81695	15924

*Fast Connection

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

 NORMAL STOCK ITEMSW.E.F. January 25th, 2022

Sockets with Interlock Switches - for guaranteed safety of operation

- Allows closure of main switch only when the plug is fully inserted in socket - when complete mechanical & electrical connection has occurred
- Plug removal is possible only when the switch is in "off" position

Wall Mounted Sockets with Interlock Switch Unika (w/o protection)

83047

83081

- Switch designed for use in AC 22A class applications
- Conforms to IEC 60309-1 & IEC 60309-2
- Rated operational voltage upto 415V
- Rated operational current upto 32A
- External impact strength: IK08
- Available in IP44 / IP65 versions
- Glow wire test: 750°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
IP44				
16	200...250	2P + E	83031	7940
	380...415	3P + E	83035	13354
		3P + N + E	83036	11206
32	200...250	2P + E	83042 <input checked="" type="checkbox"/>	10308
	380...415	3P + E	83046	14598
		3P + N + E	83047	12146
IP65				
16	200...250	2P + E	83081	8215
	380...415	3P + E	83085	11312
		3P + N + E	83086	11542
32	200...250	2P + E	83092	10766
	380...415	3P + E	83096	15705
		3P + N + E	83097	12927

Socket with Interlock Switch & DIN Rail Isoblock (4.5 modules)

82754

83796

- Switch designed for use in AC- 22A class applications
- Conforms to IEC 60309-1 & IEC 60309-2
- Provision to DIN mount 4.5 module device
- External impact strength: IK10
- Available in IP65 version
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
16	200...250	2P + E	82754 <input checked="" type="checkbox"/>	9842
	380...415	3P + E	82758	14565
		3P + N + E	82759	15051
32	200...250	2P + E	83791 <input checked="" type="checkbox"/>	11653
	380...415	3P + E	83795	16758
		3P + N + E	83796	13883

Socket with Interlock Switch & DIN Rail Isoblock (6 modules)

82766

82771

- Switch designed for use in AC- 22A class applications
- Conforms to IEC 60309-1 & IEC 60309-2
- Provision to DIN mount 6 module device
- External impact strength: IK10
- Available in IP65 version
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
32	200...250	2P + E	82766	15373
	380...415	3P + E	82770	21899
		3P + N + E	82771	18570
63	380...415	3P + E	82782	20714
		3P + N + E	82783	20780

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

ELECTRA Metal Clad Plugs & Sockets are specially designed incorporating the latest safety, quality and user friendly features.

Construction

- The casting is made from non-corroding die-cast aluminum alloy combining exceptional compactness with high strength
- The design/construction eliminates the possibility of mismatch in fitting of plugs in corresponding sockets
- The floating contacts in the sockets are self aligning and facilitates smooth plugging in without undue pressure (These can be easily removed for wiring)
- A provision for pilot pin facilitates mechanical interlocking in case of 63A ratings

Human Safety

Specially designed shroud to avoid accidental finger contact with plug-pins while inserting/removing the plug
Similarly, the contact tubes in sockets are deeply recessed to avoid human contact

- The earthing pins ensure that earth connection is made first and broken last, being longer than conducting pins
- The visible earth terminals facilitate easy checking of earth connection
- The cable grip to the plug is made very strong by providing a compression gland and by protecting it at the point of entry by a strong rubber guard

Applications

Industrial, Commercial & Domestic portable equipments like Hand/Power Tools, Industrial Ovens, Welding Sets, Mobile Generators, Furnaces, Ships, Office Machines, Refrigerators, Coolers, Air-Conditioners, Overhead Cranes, Chilling Cabinets, Tile Polishers and Sewing Machines

Plug



Rating (A)	Poles Description	Voltage (V)	MOQ	Reference	Unit MRP [₹]
10	2P	250	30	AP10 <input checked="" type="checkbox"/>	262
20	2P	250	30	AP20 <input checked="" type="checkbox"/>	275
20	3P	440	30	BP20 <input checked="" type="checkbox"/>	366
30	3P	440	20	BP30 <input checked="" type="checkbox"/>	667
63	3P+N+E	440	4	CP63 <input checked="" type="checkbox"/>	3015

Socket



Rating (A)	Poles Description	Voltage (V)	MOQ	Reference	Unit MRP [₹]
10	2P	250	30	AS10 <input checked="" type="checkbox"/>	275
20	2P	250	30	AS20 <input checked="" type="checkbox"/>	293
20	3P	440	30	BS20 <input checked="" type="checkbox"/>	411
30	3P	440	20	BS30 <input checked="" type="checkbox"/>	706
63	3P+N+E	440	4	CS63 <input checked="" type="checkbox"/>	3313

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

Complete range of switches & sockets suitable for both indoor & outdoor applications like Kitchens, Swimming Pools, Landscape Gardens, Exterior Walls and Other Environmentally Challenged Locations.



56SW116LE-GY



56SW216LE-GY



56SW332LE-GY

Description	IP Rating	Reference	Unit MRP ₹
Surface Switches			
Single Pole Switches Less Enclosure			
1 Pole 250V 10A	IP66	56SW110LE-GY	3533
1 Pole 250V 16A	IP66	56SW116LE-GY	3310
1 Pole 250V 20A	IP66	56SW120LE-GY	5013
1 Pole 250V 32A	IP66	56SW132LE-GY	5921
Double Pole Switches Less Enclosure			
2 Pole 500V 16A	IP66	56SW216LE-GY	5721
2 Pole 500V 20A	IP66	56SW220LE-GY	5721
2 Pole 500V 32A	IP66	56SW232LE-GY	6642
2 Pole 500V 50A	IP66	56SW250LE-GY	7082
Triple Pole Switches Less Enclosure			
3 Pole 500V 10A	IP66	56SW310LE-GY	5290
3 Pole 500V 16A	IP66	56SW316LE-GY	5519
3 Pole 500V 20A	IP66	56SW320LE-GY	5810
3 Pole 500V 32A	IP66	56SW332LE-GY	6774
3 Pole 500V 50A	IP66	56SW350LE-GY	7816
3 Pole 500V 63A	IP66	56SW363LE-GY	9073
Four Pole Switches Less Enclosure			
4 Pole 500V 20A	IP66	56SW420LE-GY	7670



66CV563-RG



66P563-EO

Description	IP Rating	Reference	Unit MRP ₹
IP66 Industrial Combination Switch Sockets with Enclosure			
Single Pole Switches Less Enclosure			
500V, 63A with 4 pole switch and 63A 5 Pin Socket	IP66	66CV563-RG	102828
Plug Top 5 Pin 500V 63A	IP66	66P563-EO	30864

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022



56SO316RP-LE-GY-EX



56SO432LE-GY



56SO532LE-GY

Description	IP Rating	Reference	Unit MRP [₹]
Surface Socket Outlets			
3 Pin Sockets Less Enclosure			
3 Pin 250V 16A Indian Standard	IP66	56SO316RP-LE-GY-EX	3332
3 Pin 250V 20A Round Pin	IP66	56SO320LE-GY	4838
3 Pin 250V 32A Round Pin	IP66	56SO332LE-GY	5338
4 Pin Sockets Less Enclosure			
4 Pin 500V 20A Round Pin	IP66	56SO420LE-GY	7157
4 Pin 500V 32A Round Pin	IP66	56SO432LE-GY	8558
4 Pin 500V 40A Round Pin	IP66	56SO440LE-GY*	9947
4 Pin 500V 50A Round Pin	IP66	56SO450LE-GY	13168
5 Pin Sockets Less Enclosure			
5 Pin 500V 10A Round Pin	IP66	56SO510LE-GY	7734
5 Pin 500V 20A Round Pin	IP66	56SO520LE-GY	7734
5 Pin 500V 32A Round Pin	IP66	56SO532LE-GY	9185
5 Pin 500V 40A Round Pin	IP66	56SO540LE-GY	13251
5 Pin 500V 50A Round Pin	IP66	56SO550LE-GY	13606

*Alternate reference 56SO440-GY (coming soon)



56PA316RP-GY-EX



56PA420-EO



56PA532-EO



56CV-1520-GY

Description	IP Rating	Reference	Unit MRP [₹]
Plugs			
3 Pin Angle Plugs			
3 Pin 250V 16A Indian Standard	IP66	56PA316RP-GY-EX	2506
3 Pin 250V 20A Round Pin	IP66	56PA320-EO	5013
3 Pin 250V 32A Round Pin	IP66	56PA332-EO	5736
4 Pin Angle Plugs			
4 Pin 500V 20A Round Pin	IP66	56PA420-EO	6109
4 Pin 500V 32A Round Pin	IP66	56PA432-EO	6359
4 Pin 500V 40A Round Pin	IP66	56PA440-EO	7475
4 Pin 500V 50A Round Pin	IP66	56PA450-EO	7546
5 Pin Angle Plugs			
5 Pin 500V 10A Round Pin	IP66	56PA510-EO	6005
5 Pin 500V 20A Round Pin	IP66	56PA520-EO	6005
5 Pin 500V 32A Round Pin	IP66	56PA532-EO	6937
5 Pin 500V 40A Round Pin	IP66	56PA540-EO	7337
5 Pin 500V 50A Round Pin	IP66	56PA550-EO	7511
Combination Switch Socket Outlet			
IP66 Interlocked Switch Socket with Enclosure			
4 Pin 500V 20A Round Pin	IP66	56CVI420-GY	18549
5 Pin 500V 20A Round Pin	IP66	56CVI520-GY	22665
5 Pin 500V 32A Round Pin	IP66	56CVI532-GY	22873

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022



56DB2-GY



56DB4-GY



56CB4N-GY

Description	IP Rating	Reference	Unit MRP ₹
Adaptable Enclosures with Gear Tray			
2 Gangpoints, 198X101X140mm	IP66	56DB2-GY	6254
3 Gangpoints, 294X101X140mm	IP66	56DB3-GY	8331
6 Gangpoints, 294X198X140mm	IP66	56DB6-GY	13766
Junction Boxes			
1 Gangpoint, 107X101X90mm	IP66	56JB1-GY	2850
2 Gangpoints, 204X101X90mm	IP66	56JB2-GY	4582
3 Gangpoints, 300X101X90mm	IP66	56JB3-GY	6873
4 Gangpoints, 204X198X90mm	IP66	56JB4-GY	9218

Description	Module Width	Reference	Unit MRP ₹
Switchgear Cover Assembly			
For 1,2,3 Pole MCB with 4 Pole RCD (max. 4M Width)	4	56CB4N-GY	5442



56FA2-GY



56E2-GY



56E1-GY-EX



56E3-GY

Description	No. of Gangs	Reference	Unit MRP ₹
Flush Surrounds			
Flush Surround	1	56FA1-GY	1860
Flush Surround	2	56FA2-GY	2681
Flush Surround	3	56FA3-GY	4221
Mounting Enclosures (Back Boxes)			
101X101X63mm	1	56E1-GY	1247
198X101X63mm	2	56E2-GY	2991
294X101X63mm	3	56E3-GY	4749
198X198X63mm	4	56E4-GY	6109
294X198X63mm	6	56E6-GY	9768
391X198X63mm	8	56E8-GY	12815
294X294X63mm	9	56E9-GY	14252
391X391X63mm	16	56E16-GY	23220

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 25th, 2022

SWITCH TO STYLE



Perfect solutions for the perfect you



Unica Pure



Clipsal X



Opale



Anti-Bacterial Range

LIVIA
Life. Style.